Fuse-holder base for cylindrical fuses 16A 380 V~ and size 8x32 mm

REF. **26001-39**

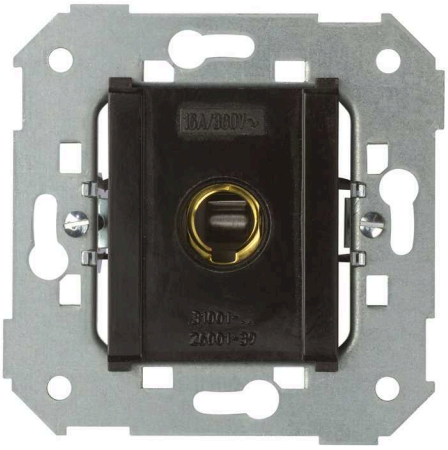

BASIC INFORMATION

COMPATIBILITY

Simon 75, Simon 82 Detail, Simon 82 Nature and Simon 82 frames

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CURRENT (A)
16 A

POWER SUPPLY (V~)
380 V~

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

IP RATING
IP20

STORAGE TEMPERATURE RANGE (ºC)
-25 - 50 ºC

NUMBER OF POSSIBLE ELEMENTS
1 element

OPERATING TEMPERATURE RANGE (ºC)
5 - 40 ºC

VERSION
Single

INDICATOR FUNCTION
No

MODE OF OPERATION
Cylindrical fuse

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
12

INSTALLATION TYPE
Suitable for surface and flush mounting

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Screw

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.095

PRODUCT NET WEIGHT
0.095

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053015254

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
82

PACKAGING WIDTH
165

PACKAGING LENGTH
223

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
3017190

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.945

PACKAGING NET WEIGHT
0.95

PACKAGING WEIGHT UNIT
KGM