


2-way switch for card with 1 micro switch and light indicator 250V~

REF. 26526-39

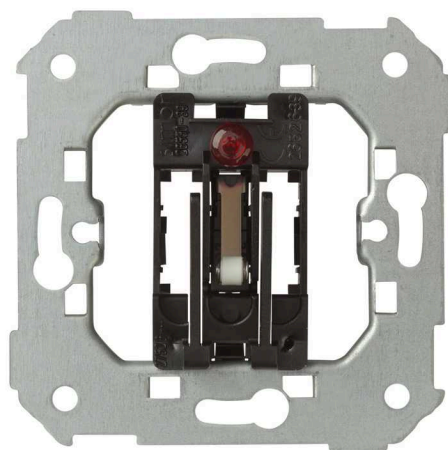

BASIC INFORMATION

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 44 Aqua, Simon 75, Simon 82 Detail, Simon 82 Nature and Simon 82 frames

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC001590

REMARKS

A contactor must be installed at the output of the mechanism. If this is not done, the maximum current of the switch is 10 A resistive (1.5 A inductive). It is recommended to protect the faston connectors with a heat shrink sleeve.

TECHNICAL INFORMATION

CABLE SECTION ADMITTED (MM) 0,5 mm	IP RATING IP20	POWER SUPPLY (V~) 250 V~
NUMBER OF POSSIBLE ELEMENTS 1 element	MAINTENANCE Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
FREQUENCY (HZ) 50 Hz	TYPE OF MECHANISM Card	VERSION Single
INDICATOR FUNCTION Yes	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C	VOLTAGE (V~) 250 V~
CURRENT (A) 10 (1,5 ind.) A		

INSTALLATION AND MAINTENANCE

CLAW Simon 27	INSTALLATION DIRECTION Vertical and horizontal	KIT INSTALLATION DIRECTION Vertical and horizontal
INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	INSTALLATION TYPE Suitable for surface and flush mounting	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Faston

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 61058:2002 + EN 61058:2002 A2:2008 + EN 61058-2-1:2011

LOGISTICS INFORMATION

UNITARY EAN CODE 8421053250082	UNITARY PACKAGING WEIGHT UNIT KGM	UNITS CONTAINED PACKAGING 10
UNITARY PACKAGING GROSS WEIGHT 0.05	UNITARY PACKAGING WIDTH 0	PACKAGING MEASUREMENT UNIT MMT
UNITARY PACKAGING HEIGHT 0	PACKAGING EAN 8421053024416	PACKAGING VOLUME 3017190
UNITARY PACKAGING LENGTH 0	PACKAGING GROSS WEIGHT 0.5	PACKAGING VOLUME UNIT MMQ
PRODUCT NET WEIGHT 0.05	PACKAGING HEIGHT 82	PACKAGING WEIGHT UNIT KGM
UNITARY PACKAGING VOLUME 3017190	PACKAGING LENGTH 223	PACKAGING WIDTH 165
UNITARY PACKAGING VOLUME UNIT MMQ	PACKAGING NET WEIGHT 0.5	