
Trim plate for 2 quick-connection connectors with 3 poles male or female for 1 element white Simon K45

REF. **KB18/9**

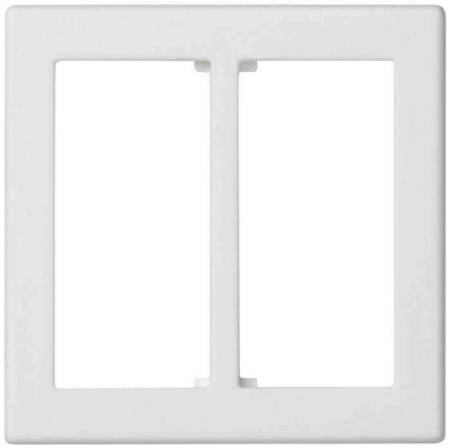

BASIC INFORMATION

DESCRIPTION

The collection Simon K45 presents its trim plate for 2 fast-connection connectors with 3 poles, in a few simple but elegant finishes in white, to choose between male or female, the piece measures 45x45x8,5 mm, a thickness of 8.5 mm and has been manufactured with thermoplastic components halogen-free, guaranteeing no flame spread in case of fire, if it had fire, and low toxicity extremely if any smoke. Whenever the clips have between 1.5 and 2 mm in thickness, you will have no problem when it comes to fix the model corrector. This is possible thanks to the fact that our plate is compatible with all major brands of fast-connection connectors. In Simon we are a leading company in the sector in terms of solutions for the home, therefore, if what you are looking for is that your home with the best solutions for workplace solutions, you can veined the collection Simon K45. A collection designed to offer the best quality and products at the forefront of technology. This comes from one of the best marks on the market.

FINISH

White

MATERIAL

Plastic

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-030)

PACKAGING CONTENTS

Plate for 2 fast-connection connectors with 3 poles

ETIM CLASS

EC000011

REMARKS

Connectors not included (to be purchased separately). If using another quick connect brand, the plate is compatible with the leading manufacturers (Wieland®, Wago®, etc). To fix the connector to the plate correctly, the clips must be between 1.5 and 2 mm thick.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

AVAILABLE IN
Versions for 1 and 2 quick-connection connectors with 3 male or female poles

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60° C

FORMAT
GST18

INDICATOR FUNCTION
No

IP RATING
IP20

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60° C

NUMBER OF MODULES
Half

RAL
9003

VERSION
Double

INSTALLATION AND MAINTENANCE

TYPE OF FASTENING
Fixing by direct snap-fit, no tools needed

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-030)

INSTALLATION DIRECTION
Vertical according to the direction of the mechanisms

INSTALLATION TYPE
Suitable for surface and flush mounting

REMOVAL OF THE PLATE
Only with tool

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60535:2009 A1:2013

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
45570

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.007

PRODUCT NET WEIGHT
0.007

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8426436036734

UNITS CONTAINED PACKAGING
20

PACKAGING HEIGHT
70

PACKAGING WIDTH
93

PACKAGING LENGTH
140

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
911400

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.14

PACKAGING NET WEIGHT
0.14

PACKAGING WEIGHT UNIT
KGM