

Double-pole switch 16AX 250V~ for half element with pilot light and screw terminal connection system ivory Simon 27 Play

REF. 27134-61



BASIC INFORMATION

DESCRIPTION

This product is a control mechanism belonging to the Simon Play 27 series. Specifically is a double-pole switch to half element with 16 A current and 250 volts. The product comes with a built-in pilot light. Its installation is designed to be carried out in a simple way, by means of recessed or surface-mounted, always thinking about facilitate the task of the user. It is composed of a module and measures 22.5 x 45 millimetres and features an original and stylish finished in ivory colour, it is ideal for any room with similar features aesthetic and decorative. The rocker operation type is fast and has a capacity of wire section of 1.5 to 2.5 millimetres. Its manufacturing materials make it capable of providing an optimal operation even under high and very low temperatures, which at the same time, it provides security is required. It should be borne in mind that to keep it does not need of any cleaning product specific and dry cleaned, with a cloth.

FINISH

Ivory

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rocker

ETIM CLASS

EC001590

TECHNICAL INFORMATION

AVAILABLE MARKET CE	CURRENT (A) 16 AX	NOMINAL VOLTAGE (V~) 250 V~
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	IP RATING IP20	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C
CONSUMPTION INDICATOR (MA) 0.55 mA	MAINTENANCE Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
NUMBER OF POSSIBLE ELEMENTS Half element	TYPE OF MECHANISM Pivoting	VERSION Single
INDICATOR FUNCTION Yes		

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 11	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal, American, Small spaces and Centralisations	INSTALLATION TYPE Suitable for surface and flush mounting
CLAW Simon 27	INSTALLATION DIRECTION Horizontal, Vertical	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.035

PACKAGING MEASUREMENT

UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT

UNIT

KGM

PACKAGING VOLUME

0.012

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8421053075562

PACKAGING VOLUME UNIT

HLT

UNITARY PACKAGING VOLUME

1201200

UNITS CONTAINED PACKAGING

5

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING VOLUME

UNIT

MMQ

PACKAGING HEIGHT

52

PACKAGING NET WEIGHT

0.175

UNITARY PACKAGING GROSS

WEIGHT

0.035

PACKAGING WIDTH

105

PACKAGING WEIGHT UNIT


KGM

PACKAGING LENGTH


220

MECANISMOS SIMON 27, 28 Y 44


Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch
XX00101-XX




Pulsador / Push button switch
XX00150-XX



Interrupor bipolar / Double pole switch
XX00133-XX




Conmutador / 2-way switch
XX00201-XX

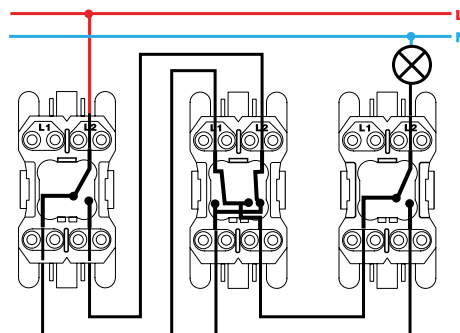


Conmutador cruce / Intermediate switch
XX00251-XX


Mecanismos con piloto / Pilot switches




Interrupor unipolar / Single-pole switch
XX00102-XX




Interrupor bipolar / Double pole switch
XX00134-XX

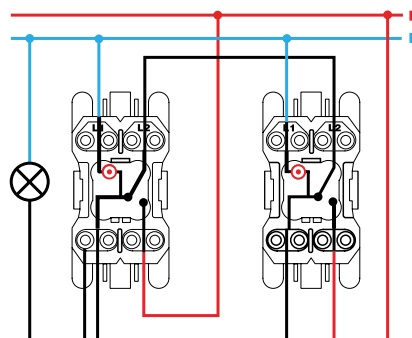


Conmutador / 2-way switch
XX00202-XX




Interrupor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX

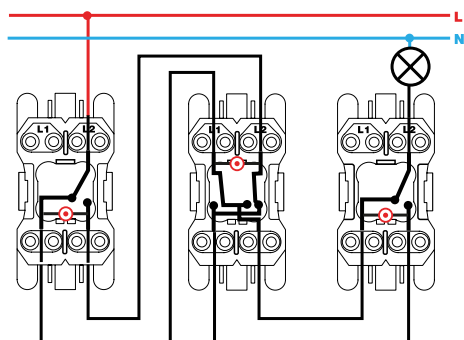

Conmutador cruce / Intermediate switch
XX2700254-XX