
Push button 16A 250V~ with built-in indicator light and quick terminal connection system Simon K45

REF. **K304**

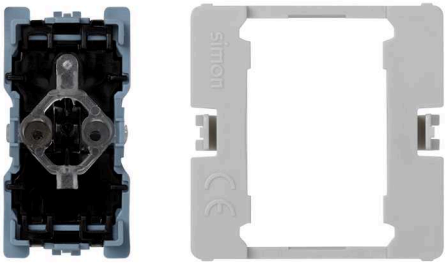

BASIC INFORMATION

DESCRIPTION

Designed for offices and working areas, the push-button switch with built-in light of the collection Simon 45, it is the perfect to combine functionality, innovation and practical design in a single space. With this push-button switch with signalling function, you can beacon the mechanism and find their position in situations of low or zero lighting. It also includes a rocker function and is compatible with a voltage of power of 250 Volts, and 16 Ampere current. It is composed of metal materials isolated with halogen-free and thermoplastic trim of the same material, to guarantee protection in case of fire. Consists of 1 module for half element in a dimension of 22 x 45 mm and with a cross-cable section cross-section of up to 1, 5 mm and stripping of 11 mm Its installation is suitable for recessed or surface-mounted and with quick terminal connection. It is not possible to combine 2 narrow rocker mechanisms in a adaptor plate Simon 500 Cima-Simon 45.

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-03X)

PACKAGING CONTENTS

Mechanism and instructions

ETIM CLASS

EC000029

REMARKS

It is not possible to combine 2 narrow button control mechanisms on a Simon 500 Cima-Simon K45 adapter plate

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CABLE SECTION ADMITTED (MM)

Up to 1,5 mm

CONSUMPTION INDICATOR (MA)

0.55 mA

NUMBER OF POSSIBLE ELEMENTS

Half element

INDICATOR FUNCTION

Yes

CURRENT (A)

16 A

IP RATING

IP20

TYPE OF MECHANISM

Tilting

NOMINAL VOLTAGE (V~)

250 V~

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

VERSION

Single

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima through adaptor (ref.50012088-03X)

INSTALLATION TYPE

Suitable for surface and flush mounting

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-1:1999 + EN 60669-1:1999 A1:2002 + EN 60669-1:1999 A2:2008

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0.3

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.028

PRODUCT NET WEIGHT
0.028

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8426436046993

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
47

PACKAGING WIDTH
47

PACKAGING LENGTH
47

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
103823

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.28

PACKAGING NET WEIGHT
0.28

PACKAGING WEIGHT UNIT
KGM