


USB charger type A+C port 65W PowerDelivery and QuickCharge white Simon K45

REF. K126H/9

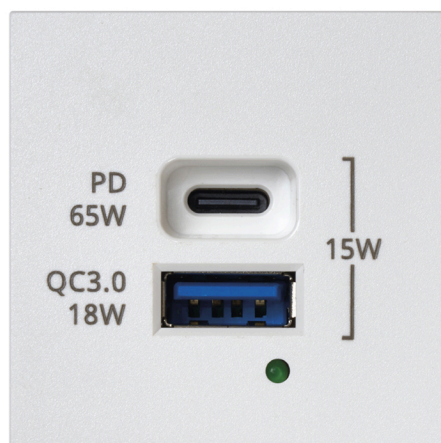

BASIC INFORMATION

DESCRIPTION

With dimensions of 45 x 45 mm, the K126H/9 charging base has two USB type A+C ports in white. The dual module allows simultaneous charging of 2 devices with 65W power using Power Delivery and Quick Charge 3.0 technology, enough to maintain the charge of our portable devices. But the best part, without a doubt, is its construction with metallic components coated with self-extinguishing thermoplastic insulation and halogen-free materials, ensuring that flames do not spread in case of fire, as well as having low toxicity in the event of smoke emission. The Simon K45 collection offers suitable solutions even for the most demanding users, thanks to our commitment to innovation and the use of the highest quality materials.

FINISH

White

MATERIAL

Thermoplastic

COMPATIBILITY

K45 Solutions. 500 Cima Solutions using adapter 50012088-038.

ETIM CLASS

EC002949

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IP RATING

IP20

RAL

9003

NUMBER OF CONNECTORS

2

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

RECESS DIMENSION (MM)

48

CONNECTOR TYPE

USB A + USB C

USB CHARACTERISTICS

PD QC 65W

NUMBER OF CONTACTS

2

NOMINAL VOLTAGE (V~)

230 V~

POWER DELIVERY USB

Yes

FORMAT

USB A + USB C

PLATE TYPE

Flat

QUICK CHARGE USB

Yes

INDICATOR FUNCTION

Yes

POWER SUPPLY (V~)

230 V~

NUMBER OF WIRES

2

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

8

EXTINGUISHING (°C)

+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-10-2)

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REMOVAL OF CONNECTOR

Only with tool

INSTALLATION DIRECTION

Horizontal, Vertical

TYPE OF TERMINAL CONNECTION - FUNCTION 2

Screw

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | Dir. 2014/30/UE EMC | Dir. 2009/125/EC ErP (Reg. UE 2019/1782) | EN IEC 61000-3-2:2019 + A1:2021 + A2:2024 | EN 50563:2011 + A1:2013 | EN 61000-3-3:2013 + A1:2019 + A2:2021 | EN IEC 62368-1:2020 + A11:2020 | EN 50563:2011 + A1:2013 | EN IEC 61000-6-1:2019 | EN IEC 63000:2018 | EN IEC 61000-6-3:2021

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053329269

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053329269

PACKAGING VOLUME

232375

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

65

PACKAGING GROSS WEIGHT

0.121

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

55

PACKAGING NET WEIGHT

0.103

UNITARY PACKAGING GROSS WEIGHT

0.103

PACKAGING LENGTH

65

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.103