Service cover for 6 elements for installation in concrete floor or raised floor graphite Simon 500 Cima

REF. **52054103-038**



BASIC INFORMATION

DESCRIPTION

The Simon 500 Cima series presents the adjustable floor box for 6 elements designed to be installed in raised floor, which can be combined with the flush-mount trim cover if not installing the same floor lining of. The piece has finishes grey in colour and measures 226x187x92 mm, it also has been made with metal components with insulation coated self-extinguishing halogen-free thermoplastic in order to ensure that the flame spread if there is any some case of fire, along with a very low toxicity in the event of smoke generation. If you are the you are looking for the best quality and security for your home, the collection Simon 500 Cima is the yours, thanks to our commitment to innovation. This collection brings together the best and most safe solutions in the market.

FINISH

Graphite

MATERIAL

Plastic

PACKAGING CONTENTS

Service cover and installation manual

ETIM CLASS

EC001903

REMARKS

Once the product has been installed, you have the option to combine it with the flush-mount trim cover (ref.52053103-038) in cases where you do not install the same floor covering.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

AVAILABLE IN
2, 4, 6, 8 and 12 elements

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (ºC)
+90 ºC

HEAT RESISTANCE (ºC)
+125ºC (according rule IEC 60695-10-2)

INSULATION RESISTANCE (V-MΩ)
>5 MOhms at 500V

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (ºC)
-5 to 60 ºC

NUMBER OF MODULES
6 modules

RAL
7021

RECESS DIMENSION (MM)
170 x 210 mm

VERSION
6 elements

INSTALLATION AND MAINTENANCE

CLAW RANGE OF OPERATION (MM)
Between 14 and 54 mm

NUMBER OF COVER OPENING POSITIONS
2

REMOVAL OF COVER
Only with tool

EXTINGUISHING (ºC)
+850 ºC / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING
Using fastening claws on the concrete floor tray or the raised floor tile (provided in the service cover)

CAN BE INSTALLED IN TRAY
Plástica y metálica

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
In raised floor and concrete floor

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053101636

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

1.005

PRODUCT NET WEIGHT

1.005

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053101636

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

75

PACKAGING WIDTH

200

PACKAGING LENGTH

230

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3.45

PACKAGING VOLUME UNIT

DMQ

PACKAGING GROSS WEIGHT

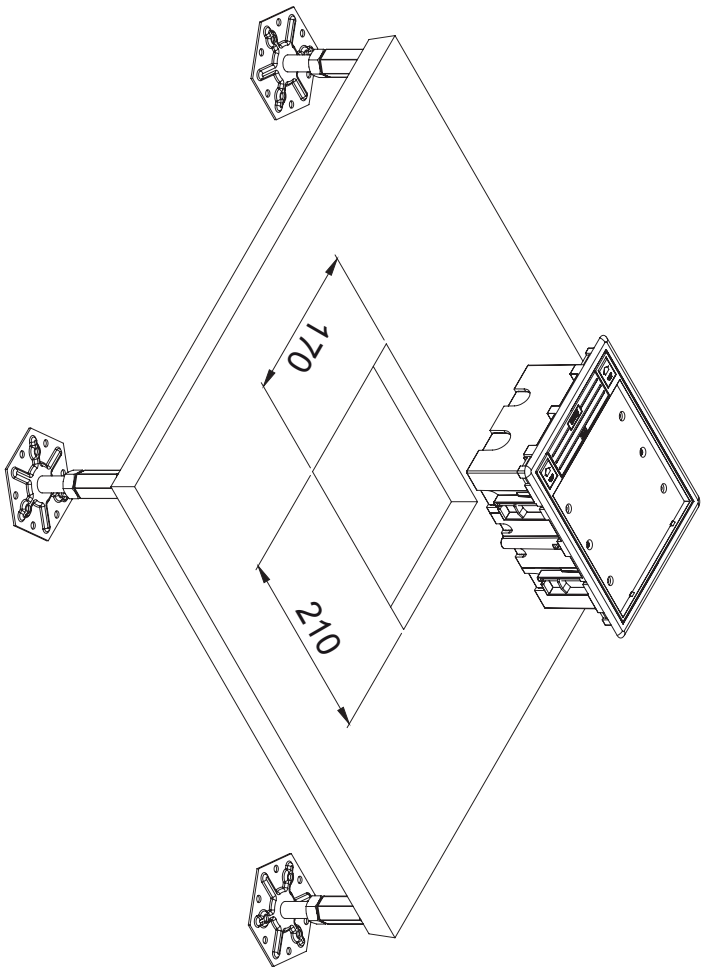
0

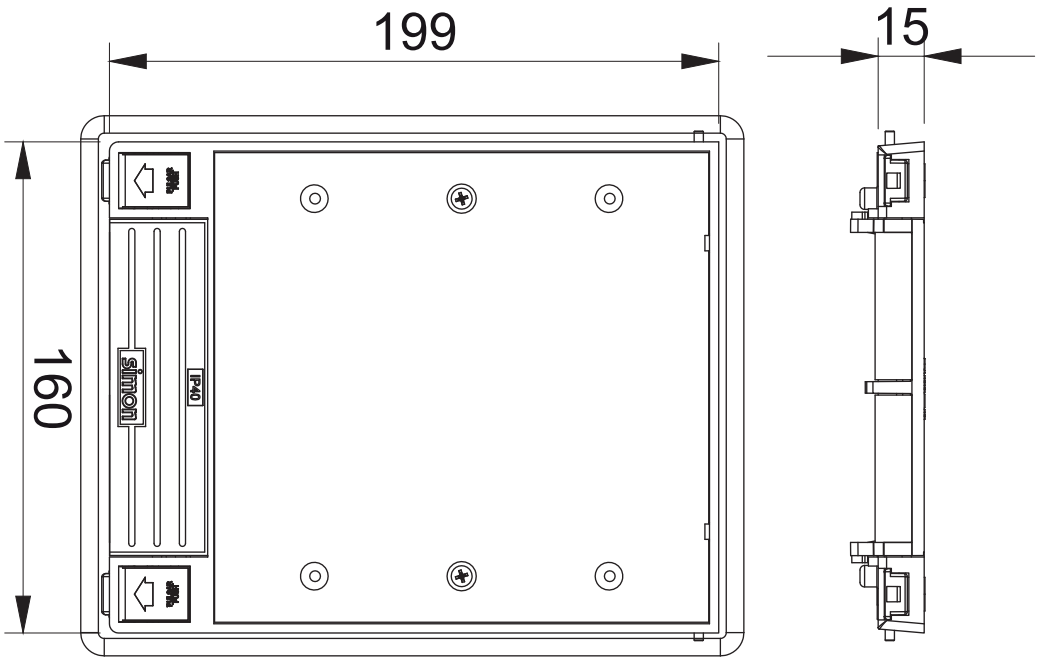
PACKAGING NET WEIGHT

1.005

PACKAGING WEIGHT UNIT

KGM


170
210


199
15
160
simon
F40