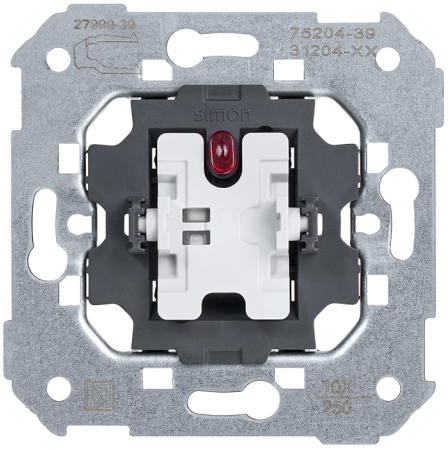
Two-way switch 10 AX 250V~ with integrated light indicator and quick terminal connection system Simon 75

REF. **75204-39**



BASIC INFORMATION

DESCRIPTION

This 10 AX 250V~ switch includes a light indicator and a quick terminal connection system, making installation a simple and agile process. In addition, it is suitable for surface and flush-mounted installation and has been manufactured in strict compliance with regulations. It is characterized by extraordinary thermal resistance, although the manufacturer recommends installing the switch in environments where the temperature is between 5 and 40°. It consists of metal pieces with halogen-free thermoplastic insulation. It belongs to the Simon 75 series, a collection that offers innovative control mechanisms like this switch and other devices suitable for adapting to any lifestyle. The series consists of pieces in a multitude of finishes and with different electronic functions that make everyday life much easier. This collection is compatible with the mechanisms of the Simon 77 series.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82.

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC001590

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

CONSUMPTION INDICATOR (MA)
1 mA

NUMBER OF CONTACTS
3

NUMBER OF POSSIBLE ELEMENTS
1 element

FREQUENCY
50 Hz

INDICATOR FUNCTION
Yes

CURRENT (A)
10 AX

IP RATING
IP20

LINKABLE
No

TYPE OF MECHANISM
Pivoting

MONOBLOCK
No

NOMINAL VOLTAGE (V~)
250 V~

OPERATING TEMPERATURE RANGE (°C)
5 - 40 °C

RECESS DIMENSION (MM)
40

STORAGE TEMPERATURE RANGE (°C)
-25 - 50 °C

VERSION
Single

VOLTAGE (V~)
250 V~

NUMBER OF WIRES
3

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
15

CLAW
Simon 27

REMOVAL OF COVER
Only with tool

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD|Dir. 2011/65/UE RoHS + post. mod.|EN 60669-1:2018|EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053255865

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.073

PRODUCT NET WEIGHT
0.073

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053003602

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
83

PACKAGING WIDTH
165

PACKAGING LENGTH
221

PACKAGING MEASUREMENT UNIT
MMT

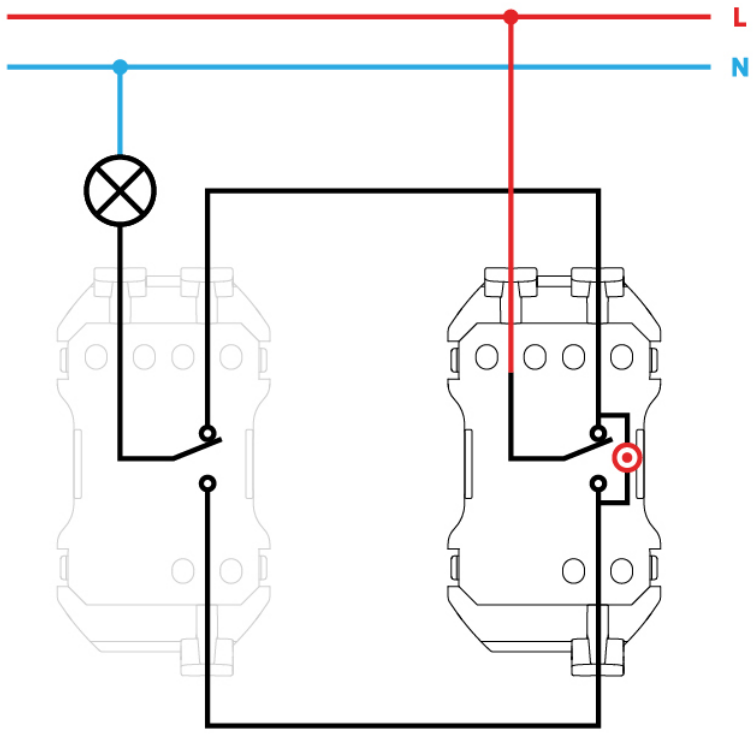
PACKAGING VOLUME
3026595

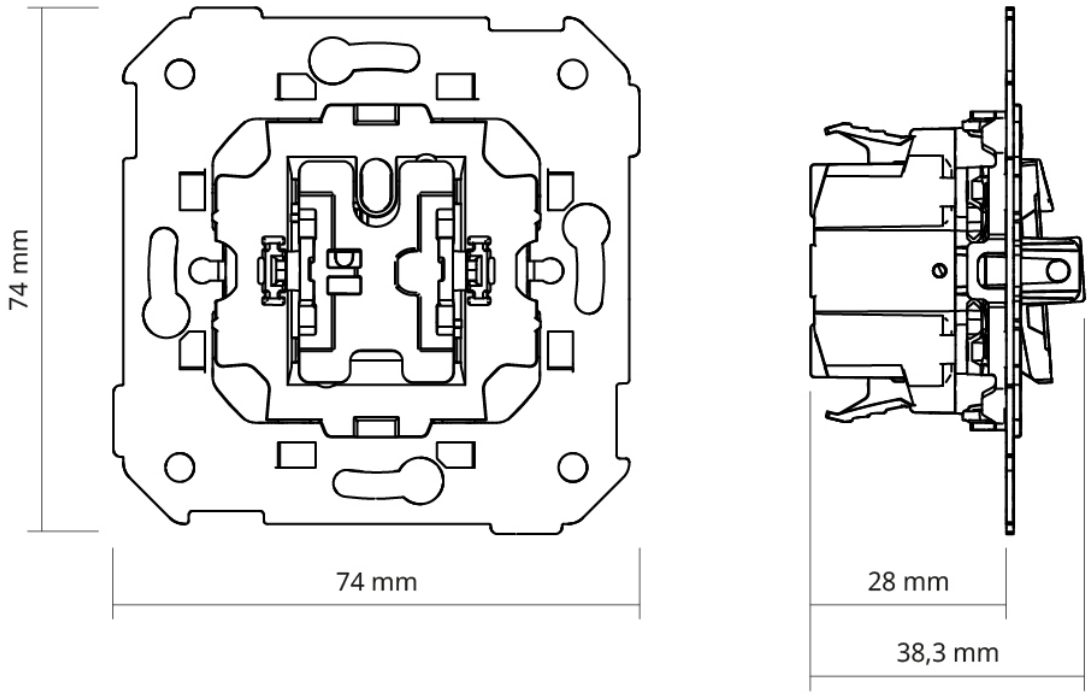
PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.725

PACKAGING NET WEIGHT
0.73

PACKAGING WEIGHT UNIT
KGM


L
N


74 mm
74 mm
28 mm
38,3 mm