Single-pole switch 10AX 250V~ with fast terminal connection system ivory Simon 27 Play

REF. **27101-62**



BASIC INFORMATION

DESCRIPTION

Design and innovation tandem form the perfect in the single-pole switch of the Simon 27 Play collection, with finishes in stylish ivory colour, this rocker switch is composed of 2 modules and has a size of 45 x 45 mm, it facilitates the integration of the set in all types of spaces and decorative styles. The convenience of a quick terminal connection, adds an installation suitable for recessed or surface-mounted, compatible with power supply of 250 Volts and 10 AX current with a cross-cable section cross-section of 1.5 to 2.5 mm and stripping of 11 mm Made of halogen-free thermoplastic and a thermoset trim, it protects the room is a possible fire, to prevent the flame spread and reduce the level of toxicity by smoke. Simon 27 Play maximize the versatility of single-pole switch to replace the finish of the supplied rocker for one of the 7 additional. Innovation, functionality and versatility in the entire range of switches Simon 27 Play.

FINISH

Ivory

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rocker

ETIM CLASS

EC001590

REMARKS

Possibility of substituting the finish of the rocker supplied with a different one. 7 additional finishes available.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

NUMBER OF POSSIBLE ELEMENTS

1 element

INDICATOR FUNCTION

No

CURRENT (A)

10 AX

IP RATING

IP21

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM

Pivoting

NOMINAL VOLTAGE (V~)

250 V~

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

VERSION

Single

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
11

CLAW
Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, American and Centralisations

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Fast

REGULATIONS

REGULATIONS
Dir. 2014/35/UE LVD|Dir. 2011/65/UE RoHS + post. mod.|EN 60669-1:2018|EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053251423

UNITARY PACKAGING HEIGHT
45.5

UNITARY PACKAGING WIDTH
38.1

UNITARY PACKAGING LENGTH
45.5

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0.079

UNITARY PACKAGING VOLUME UNIT
DMQ

UNITARY PACKAGING GROSS WEIGHT
0.032

PRODUCT NET WEIGHT
0.013

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053035474

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
53

PACKAGING WIDTH
160

PACKAGING LENGTH
220

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
1.866

PACKAGING VOLUME UNIT
DMQ


PACKAGING GROSS WEIGHT
0.315

PACKAGING NET WEIGHT
0.13


PACKAGING WEIGHT UNIT
KGM

MECANISMOS SIMON 27, 28 Y 44


Mecanismos básicos / Basic switches




Interruptor unipolar / Single-pole switch
XX00101-XX




Pulsador / Push button switch
XX00150-XX



Interruptor bipolar / Double pole switch
XX00133-XX




Conmutador / 2-way switch
XX00201-XX

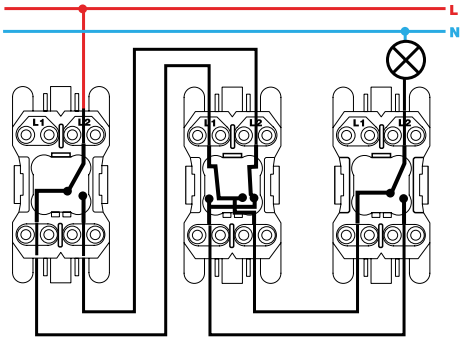


Conmutador cruce / Intermediate switch
XX00251-XX


Mecanismos con piloto / Pilot switches



Interruptor unipolar / Single-pole switch
XX00102-XX




Interruptor bipolar / Double pole switch
XX00134-XX

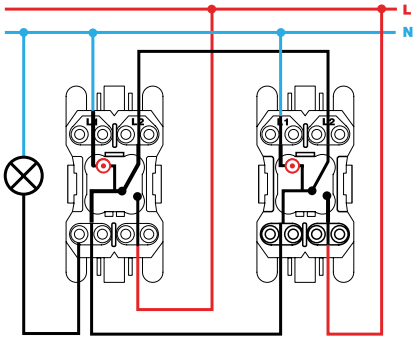


Conmutador / 2-way switch
XX00202-XX


Mecanismos con luminoso / Switches with light




Interruptor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX

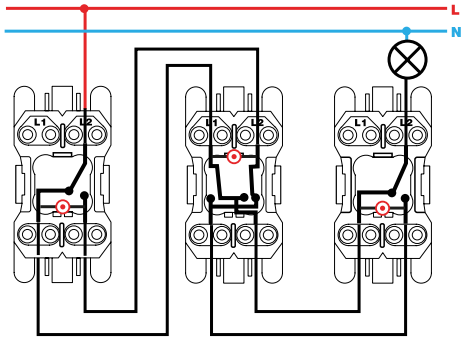

Conmutador cruce / Intermediate switch
XX2700254-XX