Metal mini tower with 3 heights and 2 sides for 6 elements per side stainless steel Simon 500 Cima

REF. **52510223-036**



BASIC INFORMATION

DESCRIPTION

This metal mini-tower is from the Simon 500 Cima series. The mini-tower has three heights and 2 sides, with capacity for 6 elements for each one of the sides. Its metallic finish you will give a touch of modernity and innovation to the place of the room of the home, office or place where it is placed. Its installation is very simple and the product is suitable both for raised and concrete floor floor, making it very versatile. Its measures are 235,5 x 221 millimetres and 133 millimetres of depth. It is necessary to highlight that Simon, looking for to provide the work to the user and optimise its products, has equipped to the mini-tower of frames that include linkable parts that make blocks, allowing separation of the electrical part from the voice and data part for easier maintenance. The product is manufactured in high quality stainless steel, which gives hardness and resistance to the set, thus ensuring a long service life.

FINISH

Metal

MATERIAL

Stainless steel

COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using an adaptor)

PACKAGING CONTENTS

Mini tower, metal partition wall, ground connection cable, screws and installation manual

ETIM CLASS

EC001941

REMARKS

The frame holders include linkable parts that form blocks, allowing the electrical part to be separated from the voice and data part for ease of maintenance

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

AVAILABLE IN
1 and 2 sides

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60 °C

ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Secured by installing the metal partition wall in the housings fitted into the box for this purpose.

IK CLASSIFICATION
08

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 120° C

NUMBER OF MODULES
6 per side

VERSION
2 sides

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS
Only with tool

TYPE OF FASTENING
Using the screws supplied

REMOVAL OF THE FRAME
Only with tool

INSTALLATION DIRECTION
Vertical

INSTALLATION TYPE
Suitable for installing in any floor type, raised or concrete

SCREWS REQUIRED FOR FLOOR FIXING
4

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 50085-2-4:2009

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053099315

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
2.75

PRODUCT NET WEIGHT
2.75

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053099315

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
134

PACKAGING WIDTH
221

PACKAGING LENGTH
236

PACKAGING MEASUREMENT UNIT
MMT

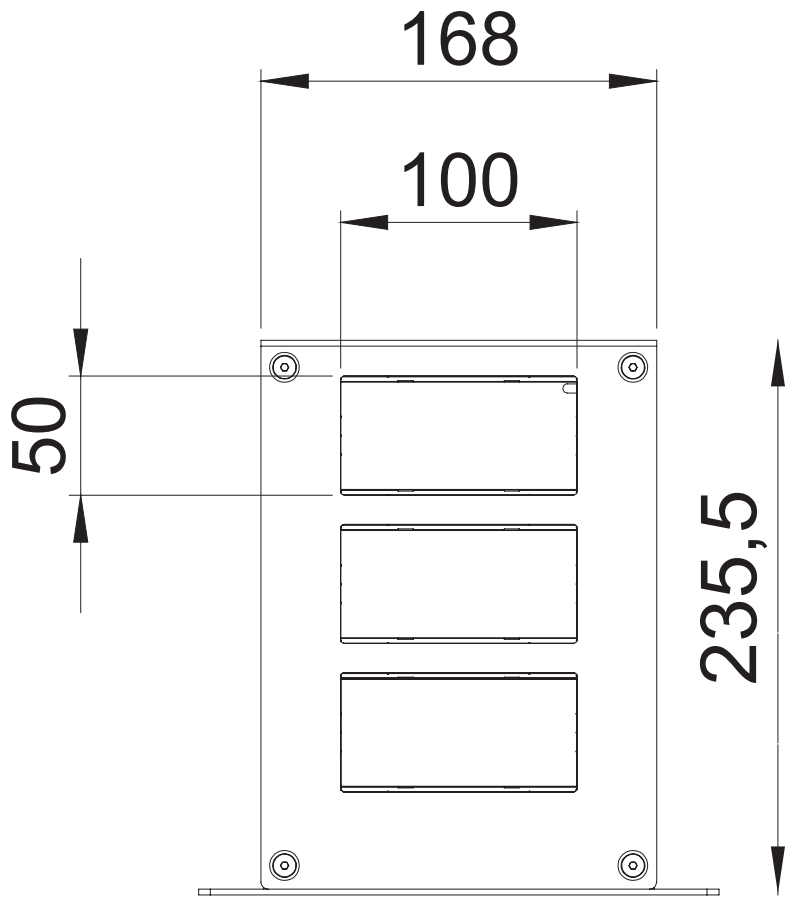
PACKAGING VOLUME
6.989

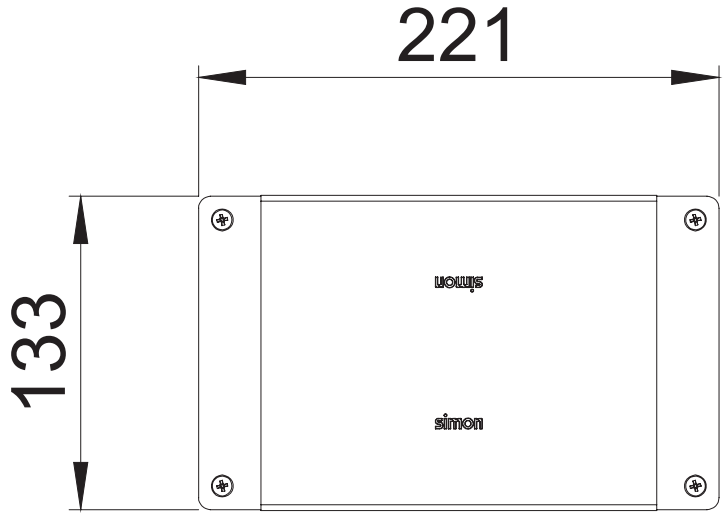
PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
2.75

PACKAGING WEIGHT UNIT
KGM


168
100
50
235,5


221
133
simon
simon