French double socket outlet 16A 250V~ with safety device and screw terminal connection red Simon 500 Cima

REF. **50000458-037**



BASIC INFORMATION

DESCRIPTION

Between the sockets and covers for electrical outlets Simon we find this double French socket outlet, current 16 A / 250V. has a safety device and the rocker operation is screwed. It is part of the Simon 500 Cima series and commitment to a stylish and vibrant finished in red colour. This socket outlet Simon can be installed on the surface-mounted or recessed. It has a total of two modules and withstands temperatures very extreme temperatures (-25 to + 60 degrees centigrade). In terms of the wire that supports is between 1.5 and 2.5 millimetres and the stripping of the need to wire is 12 millimetres. The dimensions of the exact French socket outlet Simon are 100 x 50 millimetres and a depth of 46 millimetres. It is made of metal components isolated thermoplastically and free of halogens. This type of materials eliminate the possibility of a flame spread and can reduce the toxicity in case of smoke.

FINISH

Red

PACKAGING CONTENTS

Double socket outlet with cover and installation manual

ETIM CLASS

EC000125

COMPATIBILITY

Simon 500 Cima enclosures

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

NUMBER OF CONNECTIONS PER TERMINAL
2 connections per terminal

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

FORMAT
French

HEAT RESISTANCE (°C)
+125°C (according rule IEC 60695-10-2)

INDICATOR FUNCTION
No

INSULATION RESISTANCE (V-MΩ)
>5MOhms at 500V

CURRENT (A)
16 A

IP RATING
IP20

LINKABLE
Yes, using accessory 50000996-039

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-25 to 60 °C

TYPE OF MECHANISM
Insertion

NUMBER OF MODULES
2

MONOBLOCK
No

NOMINAL VOLTAGE (V~)
250 V~

RAL
3002

NUMBER OF SOCKETS
2

VERSION
Double

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
12

REMOVAL OF COVER
Only with tool

EXTINGUISHING (°C)
+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-10-2)

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Specific Simon 500 Cima

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
Suitable for surface and flush mounting

REMOVAL OF THE SOCKET
Only with tool

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Screw

NUMBER OF TERMINALS
3 inputs and 3 outputs

REGULATIONS

REGULATIONS

Dir. 2011/65/UE RoHS + post. mod.|EN IEC 63000:2018|IEC 60884-1 Ed. 3.2|UNE 20315-1-1:2017|UNE 20315-1-2:2017|DS 60884-2-D1:2023

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
1.07

PRODUCT NET WEIGHT
1.07

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053112748

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
0

PACKAGING WIDTH
0

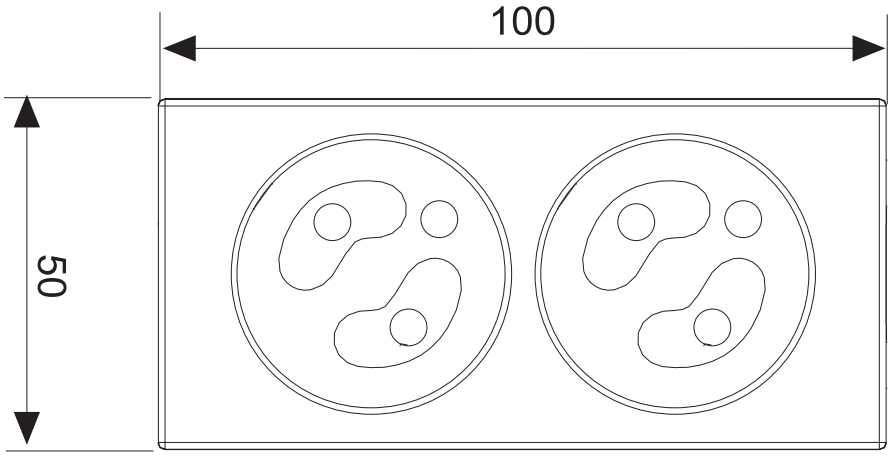
PACKAGING LENGTH
0

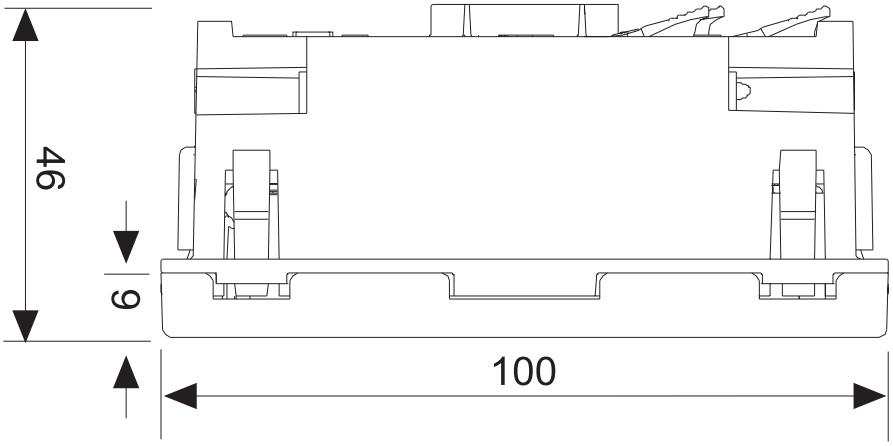
PACKAGING VOLUME
0

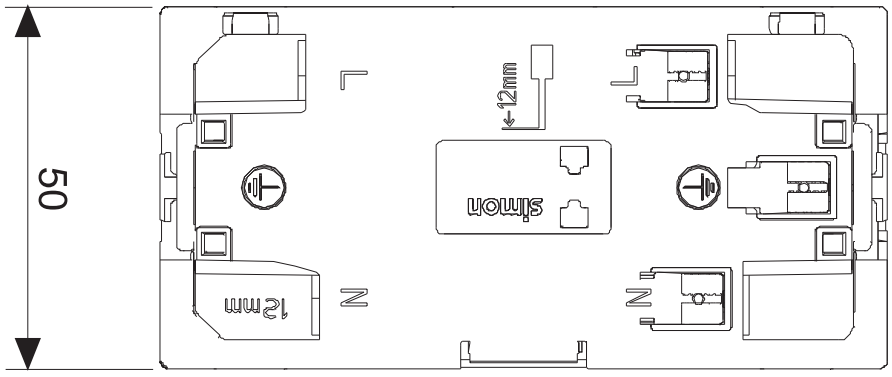
PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
10.7

PACKAGING WEIGHT UNIT
KGM


100
50


46
9
100


50
12mm
simon
12mm
N
N