

RJ11 telephone socket half element with 4 contacts white Simon 27 Play

REF. 27480-34



BASIC INFORMATION

DESCRIPTION

Colour narrow white telephone socket with 4 RJ11 pins. Its dimensions are 22.5x45 mm and the applicable legal framework is TIA 568 C. 2. At the time of cleaning and maintenance, it is recommended to use a soft cloth slightly moistened in soapy water, it is important to avoid the use of abrasive cleaners that are abrasive (or chlorine-containing). As far as its installation is concerned, the terminal connection is carried out by means of a screw system. It is suitable to be recessed and for installation in surface-mounted. It is important to take into account the maximum and minimum temperature that the part can withstand. In this line, it is worth noting that the operating range is 5 to 40° C, while the storage range is -25 to 50° C. The Simon 27 Play series allows us to play as children changing the look of the components. A revolutionary concept that allows you to take the initiative in redecorating our own spaces.

FINISH

White

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Telephone socket with 4 RJ11 pins

ETIM CLASS

EC000018

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CABLE SECTION ADMITTED (MM)

From 0,3 to 0,5 mm

NUMBER OF CONNECTORS

1

CONNECTOR TYPE

RJ11

NUMBER OF CONTACTS

4

NUMBER OF POSSIBLE ELEMENTS

Half element

FORMAT

RJ

IP RATING

IP20

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM

Insertion

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

TYPE

Category 3

VERSION

Single

NUMBER OF WIRES

2

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

12

CLAW

Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, American, Small spaces and Centralisations

INSTALLATION TYPE

Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + EN 50581:2012

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053252222

UNITARY PACKAGING HEIGHT

27

UNITARY PACKAGING WIDTH

45.7

UNITARY PACKAGING LENGTH

45.7

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0.056

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.017

PRODUCT NET WEIGHT

0.012

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053026953

UNITS CONTAINED PACKAGING

20

PACKAGING HEIGHT

53

PACKAGING WIDTH

160

PACKAGING LENGTH

220

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

1.866

PACKAGING VOLUME UNIT

DMQ

PACKAGING GROSS WEIGHT

0.338

PACKAGING NET WEIGHT

0.24

PACKAGING WEIGHT UNIT

KGM

VISTA FRONTAL E ISOMÉTRICA DEL PRODUCTO


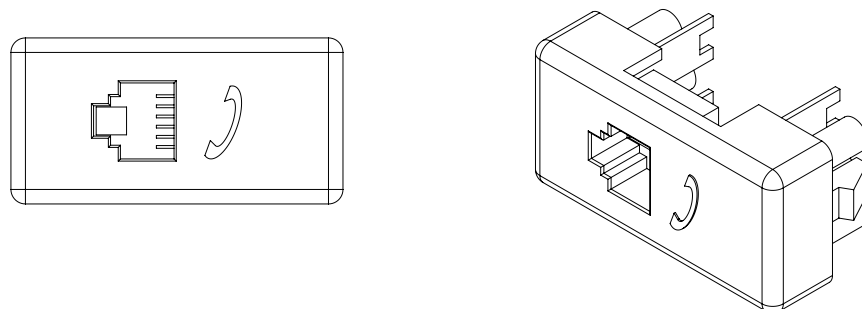


DIAGRAMA DE MONTAJE

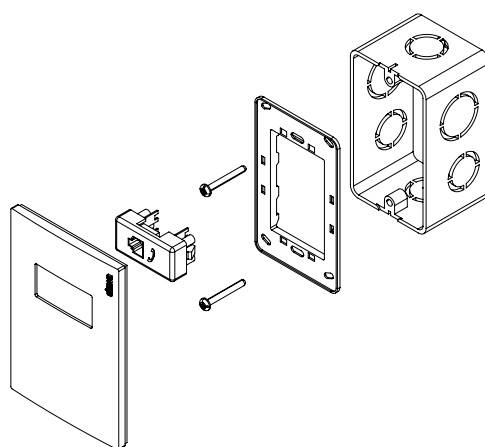

*Placa y chasis NO incluidos