


Set of 2 push-button switches for blinds 10A 250V~ without latching and with fast terminal connection white Simon 27 Play

REF. 27396-65

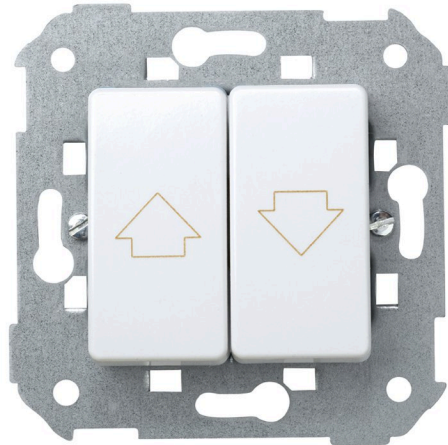

BASIC INFORMATION

DESCRIPTION

Group of 2 push buttons for blinds white in colour, without latching and with quick terminal connection of the Simon 27 Play series. It has a rocker operation and is installed by recessed and also in surface-mounted. This group of 2 push buttons without latching requires a control device and the format that presents is two-pole. It is fully compatible with the frames of the series Simon 27 Play, Simon 27 Scudo, Simon 27, Minus, Simon 27, Simon 27 Centralizations and Simon 44 Aqua. The wire that supports is from 1.5 to 2.5 mm with a stripped 11mm and works with a temperature range between 5 and 40°C, although it supports extreme temperatures of -25 to 50°C. Its design follows the standards EN 60669-1: 1999 + A1: 2002 + A2: 2008 + EN 50581: 2085 and is made of metal components with halogen-free thermoplastic insulation and thermoset trim. It measures 45x45mm and its cleaning is simple and you will have to make it only with a soft and dry cloth.

FINISH

White

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rockers

ETIM CLASS

EC000044

REMARKS

Mechanism with no latching. Requires control device.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IP RATING

IP20

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

LATCH TYPE

Non-latching

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

NUMBER OF POSSIBLE ELEMENTS

1 element

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

VERSION

Double

INDICATOR FUNCTION

No

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

250 V~

CURRENT (A)

10 A

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

CLAW

Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, American and
Centralisations

INSTALLATION TYPE

Suitable for surface and flush
mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053252031

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

3017190

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.081

PRODUCT NET WEIGHT

0.081

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053046913

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

82

PACKAGING WIDTH

165

PACKAGING LENGTH

223

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3017190

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.81

PACKAGING NET WEIGHT

0.81

PACKAGING WEIGHT UNIT

KGM