


Set of 2 push buttons 10A 250V~ with built-in blue light and quick terminal connection system

REF. 7502393-039

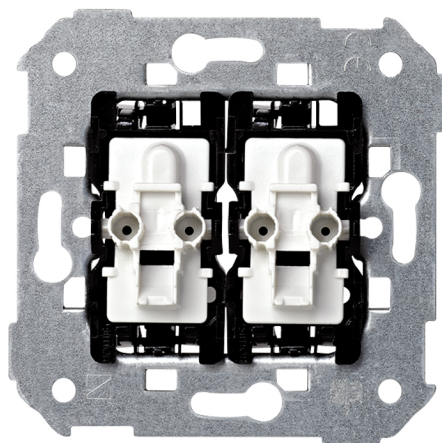

BASIC INFORMATION

COMPATIBILITY

Frames Simon 82 Detail, Simon
82 Nature, Simon 82

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC000029

REMARKS

Possibility of substituting the finish of the rocker supplied with a different one. 6 additional finishes available.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

INDICATOR FUNCTION

Yes

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

CURRENT (A)

10 A

POWER SUPPLY (V~)

230 V~

CONSUMPTION INDICATOR (mA)

1.5 mA

IP RATING

IP20

STORAGE TEMPERATURE RANGE (°C)

-20 - 75 °C

NUMBER OF POSSIBLE ELEMENTS

1 element

TYPE OF MECHANISM

Press

VERSION

Double

NOMINAL VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

CLAW

Optional

INSTALLATION TYPE

Suitable for surface and flush mounting

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WEIGHT
UNIT
KGM

PACKAGING MEASUREMENT
UNIT
MMT

UNITARY PACKAGING WIDTH
0

PACKAGING EAN
8421053084151

PACKAGING VOLUME
0

UNITARY PACKAGING LENGTH
0

UNITS CONTAINED PACKAGING
10

PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING VOLUME
0

PACKAGING HEIGHT
0

PACKAGING GROSS WEIGHT
0

UNITARY PACKAGING GROSS
WEIGHT
0.07

PACKAGING WIDTH
0

PACKAGING NET WEIGHT
0.7

PRODUCT NET WEIGHT
0.07

PACKAGING LENGTH
0

PACKAGING WEIGHT UNIT
KGM