


Intermediate switch 10 AX 250V~ with quick terminal connection Simon 75

REF. 75251-39

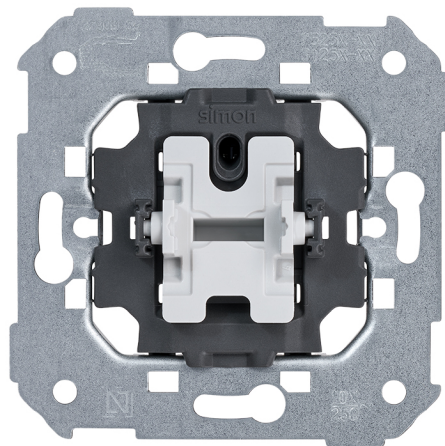

BASIC INFORMATION

DESCRIPTION

The Intermediate Switch 10 AX 250V~ with quick terminal connection system from the Simon 75 series is one of the safest mechanisms currently available on the market. This quality has made it one of the best sellers in the sector, along with a very functional design that enhances the possibilities of electrical systems in various rooms in homes or businesses where it is installed. It has the option to implement signaling function through a signal holder and key with viewer. Suitable for surface and flush mounting with a cable section of 1.5 to 2.5 mm and cable stripping of 11 mm.

Its design supports a temperature range of -25° to 50° C thanks to the metal components with halogen-free thermoplastic insulation with which it has been made. This mechanism is valid for the Simon 75 and 82 series.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 75, Simon 82
Detail, Simon 82 Nature, Simon
82 Concept and Simon 82

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC001590

REMARKS

Possibility of implementing signalling function using cradle blinking and rocker with viewer.

TECHNICAL INFORMATION

AVAILABLE MARKET CE	CURRENT (A) 10 AX	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	IP RATING IP21	RECESS DIMENSION (MM) 40
NUMBER OF CONTACTS 4	LINKABLE No	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
NUMBER OF POSSIBLE ELEMENTS 1 element	TYPE OF MECHANISM Pivoting	VERSION Single
FREQUENCY 50 Hz	MONOBLOCK No	VOLTAGE (V~) 250 V~
INDICATOR FUNCTION No	NOMINAL VOLTAGE (V~) 250 V~	NUMBER OF WIRES 4

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 15	REMOVAL OF COVER Only with tool	INSTALLATION TYPE Suitable for surface and flush mounting
CLAW Simon 27	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053255926

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.061

PRODUCT NET WEIGHT

0.061

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053003664

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

83

PACKAGING WIDTH

165

PACKAGING LENGTH

221

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3026595

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.625

PACKAGING NET WEIGHT

0.61

PACKAGING WEIGHT UNIT

KGM

