


Flat voice and data plate without dust cover for 1 and 2 RJ45 Siemon® for 1 element white Simon 500 Cima

REF. 50021186-030

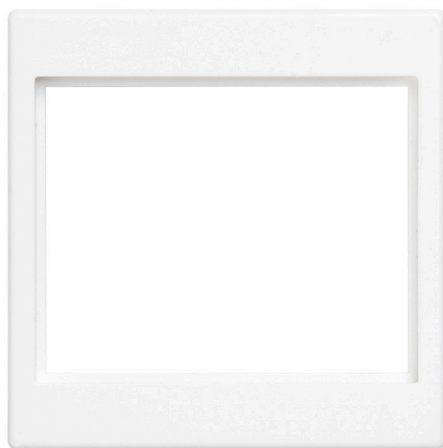

BASIC INFORMATION

DESCRIPTION

Voice and data flat plate of the Simon 500 Cima. It is a single element and is available for both one as for two RJ45 connectors, Siemon. Its white finish, which gives it enormously versatility. These voice and data plates Simon guarantees easy installation, as it does not require screws. If you want to fit the plate to Simon 500 Cima enclosures, both vertical and horizontal, it is not necessary to use adapters, as it includes the clips needed to do so easy. It is of individual version, with a module and measuring 50 x 50 mm and has 11 mm of depth. It is manufactured with thermoplastic materials that guarantee a halogen-free end is the high temperatures that support these voice and data plates. It does not include any type of halogen component, to ensure maximum security during its use. The maintenance of the voice and data plates Simon 500 Cima is very simple. For cleaning you just need to use a dry and soft rags.

FINISH

White

PACKAGING CONTENTS

Flat voice and data plate without dust cover

ETIM CLASS

EC000018

COMPATIBILITY

Simon 500 Cima enclosures

REMARKS

The plate is snap-fitted for mounting in vertical and horizontal enclosures without the need for an adaptor.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

DUST SHUTTER

No

NUMBER OF MODULES

1

AVAILABLE IN

The same plate is compatible for 1 and 2 RJ45

FORMAT

RJ45

PLATE TYPE

Flat

COMPATIBLE WITH CONNECTORS

Siemon® CT series.

IP RATING

IP20

RAL

9003

RJ45 CONNECTORS

Not included in voice and data plate

KIT AVAILABILITY

No

RJ45 ADAPTOR MODULE

Included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60 °C

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

SNAP-FIT RJ45 PLATES

Siemon® RJ45 connectors

SNAP-FIT TYPE

Siemon® RJ45 connectors

DUST PROTECTION

No

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

VERSION

Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Specific Simon 500 Cima

INSTALLATION DIRECTION

Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE

Fixing by direct snap-fit, no tools needed.

REMOVAL OF THE PLATE

Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING WIDTH

0

PACKAGING EAN

8421053097236

PACKAGING VOLUME

0.604

UNITARY PACKAGING LENGTH

0

UNITS CONTAINED PACKAGING

10

PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING VOLUME

0

PACKAGING HEIGHT

54

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING GROSS WEIGHT

0.023

PACKAGING WIDTH

52

PACKAGING NET WEIGHT

0.23

PRODUCT NET WEIGHT

0.023

PACKAGING LENGTH

215

PACKAGING WEIGHT UNIT

KGM

