


Dual USB Charger 2.1A Type A white Simon 270

REF. 20000096-090

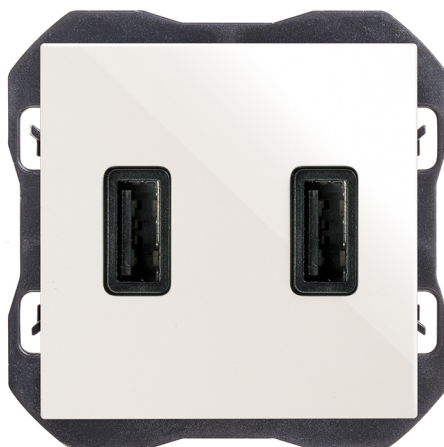

BASIC INFORMATION

FINISH

White

COMPATIBILITY

Simon 270 frames

ETIM CLASS

EC002949

MATERIAL

Plastic

PACKAGING CONTENTS

Mechanism, cover and
instruction sheet

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

INDICATOR FUNCTION

No

MONOBLOCK

No

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

IP RATING

IP20

OPERATING TEMPERATURE RANGE (°C)

5 - 45 °C

NUMBER OF POSSIBLE ELEMENTS

1 element

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

POWER SUPPLY (V~)

127/230 V~

FORMAT

USB

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

FREQUENCY

50 - 60 Hz

TYPE OF MECHANISM

Insertion

USB CURRENT (A)

2,1 A

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

7

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Suitable for flush mounting

INSTALLATION DIRECTION

Horizontal, Vertical

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2014/30/UE EMC | Dir. 2009/125/EC ErP (Reg. UE 2019/1782) | Dir. 2011/65/UE RoHS + post. mod | EN 50563:2011 + A1:2013 | EN IEC 61000-3-2:2019 + A1:2021 + A2:2024 | EN IEC 62368-1:2020 + A11:2020 | EN 61000-3-3:2013 + A1:2019 + A2:2021 | EN IEC 63000:2018 | EN IEC 61000-6-1:2019 | EN IEC 61000-6-3:2021

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053277171

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053277171

PACKAGING VOLUME

242000

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

80

PACKAGING GROSS WEIGHT

0.085

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

55

PACKAGING NET WEIGHT

0.062

UNITARY PACKAGING GROSS
WEIGHT

0.062

PACKAGING LENGTH

55

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.062

