

Socket 2P+T with safety 15A 127V~ graphite Simon 82

REF. 82422-68



BASIC INFORMATION

FINISH

Graphite

TECHNICAL INFORMATION

CABLE SECTION ADMITTED (MM)

3,3 mm

CURRENT (A)

15 A

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

VOLTAGE (V~)

127 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY
(MM)

11

TYPE OF TERMINAL
CONNECTION - FUNCTION 1

Screw

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
22.8

UNITARY PACKAGING WIDTH
39

UNITARY PACKAGING LENGTH
55

UNITARY PACKAGING
MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0.049

UNITARY PACKAGING VOLUME
UNIT
DMQ

UNITARY PACKAGING GROSS
WEIGHT
52.5

PRODUCT NET WEIGHT
52.5

UNITARY PACKAGING WEIGHT
UNIT
GRM

PACKAGING EAN
7506020305079

UNITS CONTAINED PACKAGING
24

PACKAGING HEIGHT
46

PACKAGING WIDTH
139

PACKAGING LENGTH
227

PACKAGING MEASUREMENT
UNIT
MMT

PACKAGING VOLUME
1.451

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
1.26

PACKAGING NET WEIGHT
1260

PACKAGING WEIGHT UNIT
KGM

VISTA FRONTAL E ISOMÉTRICA DEL PRODUCTO


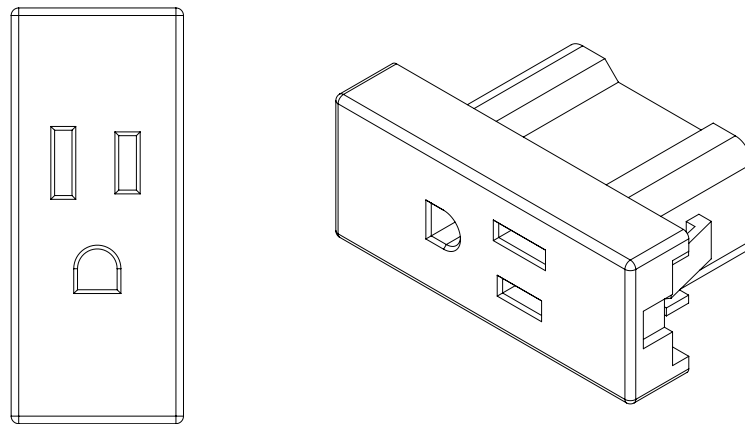


DIAGRAMA DE MONTAJE



*Placa y chasis NO incluidos

DIAGRAMA DE CONEXIÓN

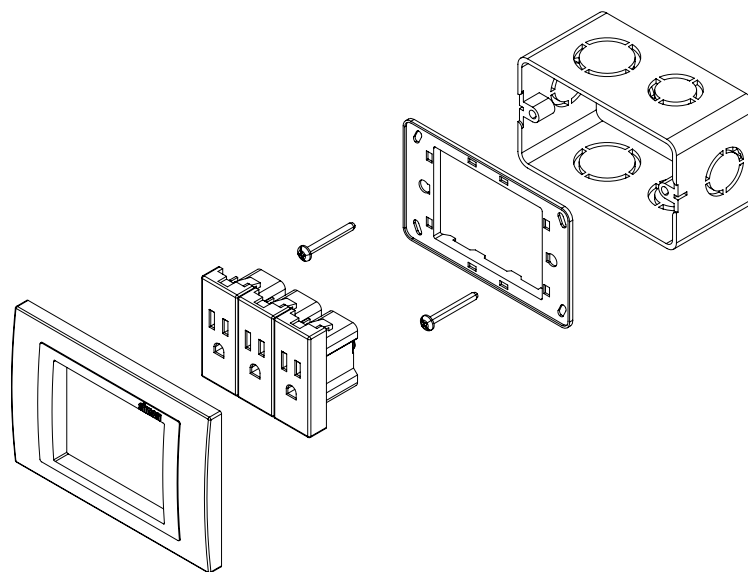