Aluminium mini column with 1 side for 10 elements graphite Simon 500 Cima

REF. **52550115-033**



BASIC INFORMATION

DESCRIPTION

It is a mini column with 1 side designed to fit 10 elements. The mechanism is made in anodised aluminium and is finished in graphite, in full compliance with the regulation. This mini column measures 709 x 110 x 72 mm and is suitable for installation in any type of floor, be it a raised or concrete flooring. This also by the shape of the baseboard, it is possible to integrate the mini column to the floor trunking 85x18 mm According to the manufacturer, the temperature range of installation recommended is placed between -25 and 120 °. Another point to be taken into account is the cleaning of this article. It is ideal to use a soft and dry cloth and give light passes. Also, it is advised not to use abrasive cleaners that have chlorine among its components. The piece is included in the Simon 500 Cima series, a collection designed to create spaces more connected.

FINISH

Aluminium

MATERIAL

Aluminium

COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using an adaptor)

PACKAGING CONTENTS

Mini column, baseboard, lower and upper trim, non-slip adhesive foam, fixing studs, ground connection cable, screws and installation manual

ETIM CLASS

EC001941

REMARKS

The shape of the baseboard allows integration of the mini column with the 85 x 18 mm floor trunking

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

AVAILABLE IN
1 and 2 sides

MAX TEMP DURING CONSTRUCTION WORK (°C)
+120 °C

EARTHING RESISTANCE
< 0.05 Ohms

ELECTRICAL PROPERTIES
With electrical continuity

ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Constant clearance between electric wiring and Voice, Data and Multimedia cables, eliminating electromagnetic interference and possible transmission errors.

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-25 to +120 °C

NUMBER OF MODULES
10

VERSION
1 side

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS
Only with tool

TYPE OF FASTENING
Using the screws supplied

INSTALLATION DIRECTION
Vertical

INSTALLATION TYPE
Suitable for installing in any floor type, raised or concrete

SCREWS REQUIRED FOR FLOOR FIXING
4

REMOVAL OF TRIM FRAMES
Only with tool

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 50085-2-4:2009

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053094419

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
2.165

PRODUCT NET WEIGHT
2.165

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053094419

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
124

PACKAGING WIDTH
142

PACKAGING LENGTH
1170

PACKAGING MEASUREMENT UNIT
MMT

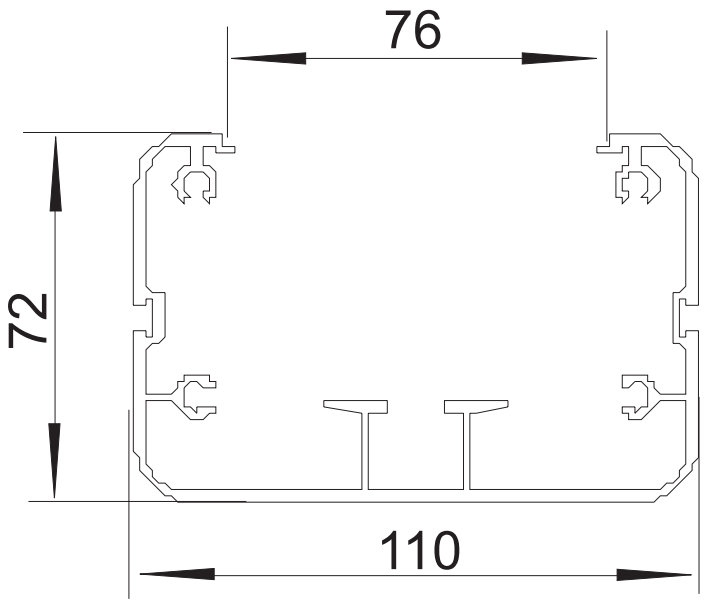
PACKAGING VOLUME
20601360

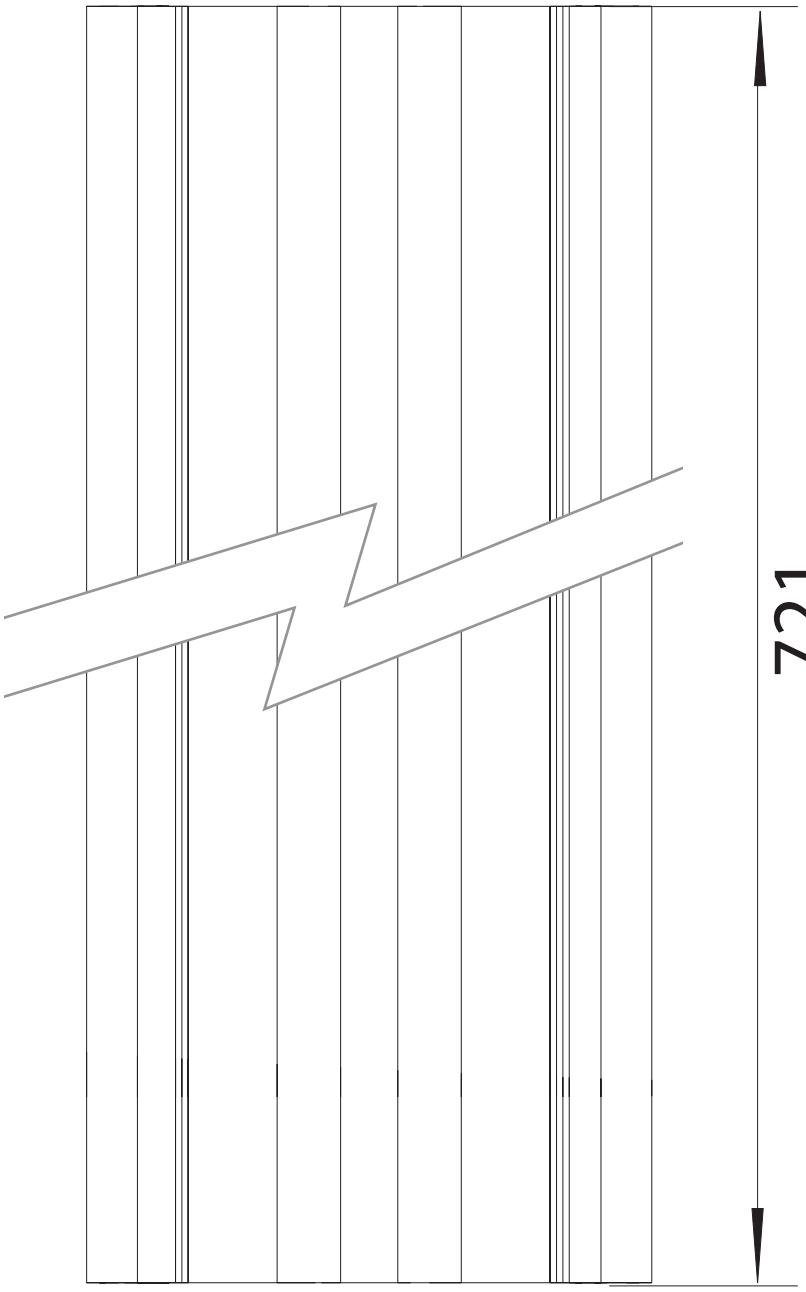
PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
2.165

PACKAGING WEIGHT UNIT
KGM


76
72
110


721