


**Combined two-pole socket (European/American) 16A 250V~
with ground and screw terminal connection graphite
Simon 27 Play**

REF. 27439-38

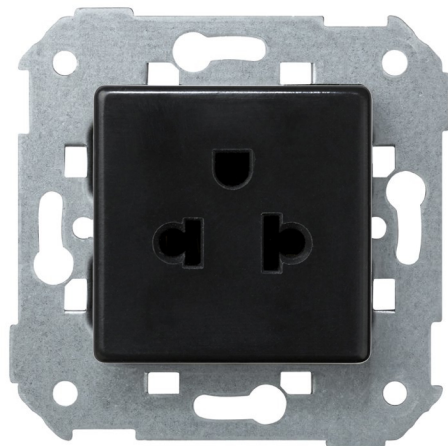

BASIC INFORMATION

DESCRIPTION

Two-pole socket outlet mixed (European and American) with ground connection and screw terminal connection, in graphite colour of the Simon 27 Play series. It works by insertion and is suitable both for surface-mounted or by recessed. This is a socket outlet suitable for replacement or export and is compatible with the frames of the series Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralizations and Simon 44 Aqua. In its design, followed by the rules IEC 60884-1: 2006 - Ed.3.1 and it is a socket outlet made of metal components with halogen-free insulation and thermoplastic trim. It measures 45xx45mm and to always have clean this socket outlet what you need is a soft, dry cloth and never use abrasive cloths or cleaners with chlorine. It supports a wire section from 1.5 to 2.5 mm with a stripped 10 mm

FINISH

Graphite

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Socket outlet with cover

ETIM CLASS

EC000125

REMARKS

Suitable for replacement or export.

TECHNICAL INFORMATION

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

IP RATING

IP20

NOMINAL VOLTAGE (V~)

125/250 V~

NUMBER OF POSSIBLE ELEMENTS

1 element

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

FORMAT

Two-pole

POWER SUPPLY (V~)

125/250 V~

INDICATOR FUNCTION

No

TYPE OF MECHANISM

Insertion

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

CURRENT (A)

16 A

MONOBLOCK

No

VERSION

Single

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

10

CLAW

Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, American and
Centralisations

INSTALLATION DIRECTION

Horizontal, Vertical

INSTALLATION TYPE

Suitable for surface and flush
mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REGULATIONS

REGULATIONS

IEC 60884-1:2006 - Ed.3.1

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053252147

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

1201200

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.079

PRODUCT NET WEIGHT

0.079

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053063002

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

52

PACKAGING WIDTH

105

PACKAGING LENGTH

220

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

1201200

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0

PACKAGING NET WEIGHT

0.79

PACKAGING WEIGHT UNIT

KGM