


Mechanism-holder unit IP66 with safety lock and Italian socket P40 socket outlet stainless steel Simon K45

REF. KSE3SEC/23/72

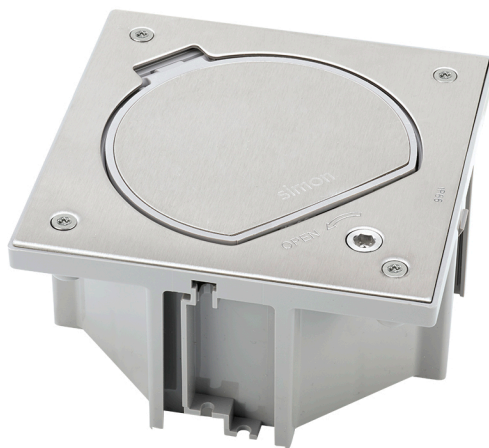

BASIC INFORMATION

DESCRIPTION

Unit mechanism-holders unit of high quality with safety lock and a socket for socket base made in resistant metal materials and finished in stainless steel. The line Simon K45 it offers us a version for one element that contains two modules for a current of 16 A and a voltage of 250V ~ suitable for a standard current circuit. The is in charge of anchor points that protect the connections to the passage of personnel on its surface-mounted without compromising the integrity of the element has dimensions of 130 x 130 x 55 mm, it works by means of a screw and the signaling function is of insertion. Allows a wire section of 1.5 mm to 2.5 mm and stripping of wire of 12mm. Its structure is specially designed for its integration into any type of raised or concrete floor (ref. KGE170 for concrete floor, and ref. KGE170TF for raised floor) and the thermoplastic baseboard to avoid the possibility of flame spread in case of fire. With the range update, its equivalent for the new version is the KFH110SEC/72 reference.

FINISH

Stainless steel

MATERIAL

Stainless steel

ETIM CLASS

EC000024

REMARKS

The cover has anchor points that protect the connections during use against pressures and stresses due to the passage of personnel.

TECHNICAL INFORMATION

FORMAT

Italian

CURRENT (A)

16 A

RECESS DIMENSION (MM)

145 x 145 mm en suelo técnico

IK CLASSIFICATION

07

IP RATING

IP66

VOLTAGE (V~)

250 V~

INDICATOR FUNCTION

No

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

12

REMOVAL OF COVER

Only with tool

CAN BE INSTALLED IN TRAY

Plastic

REMOVAL OF COMPONENTS

Only with tool

EXTINGUISHING (°C)

+650 °C (according to standard IEC 60670)

REMOVAL OF THE SOCKET

Only with tool

NUMBER OF COVER OPENING POSITIONS

1

REMOVAL OF THE FRAME

Only with tool

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053333952

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.458

PRODUCT NET WEIGHT

0.384

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053333952

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

82

PACKAGING WIDTH

147

PACKAGING LENGTH

155

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

1445213

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.458

PACKAGING NET WEIGHT

0.384

PACKAGING WEIGHT UNIT

KGM