# Aluminium mini column with 2 sides for 6 elements per side white Simon 500 Cima

REF. **52550223-030**



## BASIC INFORMATION

### DESCRIPTION

The of 2 sides aluminium mini column for 6 elements per side is part of the collection Simon 500 Cima and has a few simple and versatile finishes white in colour, measures 439x110x127 and is manufactured with materials of the best quality aluminium of the market. In addition, the shape of the baseboard allows integration of the piece with the floor trunking 85x18 mm and is suitable for installing on any floor type, whether raised or concrete. The safest mechanisms on the market are found in the Simon 500 Cima series. A series that offers the latest trends in terms of security. At Simon we know the importance of convert homes of our customers in the safest. Our wide experience and commitment by the quality converted to our products in the best option.

### FINISH

White

### MATERIAL

Aluminium

### COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using an adaptor)

### PACKAGING CONTENTS

Mini column, baseboard, lower and upper trim, non-slip adhesive foam, fixing studs, ground connection cable, screws and installation manual

### ETIM CLASS

EC001941

### REMARKS

The shape of the baseboard allows integration of the mini column with the 85 x 18 mm floor trunking

## TECHNICAL INFORMATION

### AVAILABLE MARKET
CE

### PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

### PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

### AVAILABLE IN
1 and 2 sides

### MAX TEMP DURING CONSTRUCTION WORK (°C)
+120 °C

### EARTHING RESISTANCE
< 0.05 Ohms

### ELECTRICAL PROPERTIES
With electrical continuity

### ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Constant clearance between electric wiring and Voice, Data and Multimedia cables, eliminating electromagnetic interference and possible transmission errors.

### IP RATING
IP4X

### KIT AVAILABILITY
No

### MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

### TEMPERATURE RANGE DURING INSTALLATION (°C)
-25 to +120 °C

### NUMBER OF MODULES
6 per side

### RAL
9003

### VERSION
2 sides

## INSTALLATION AND MAINTENANCE

### REMOVAL OF COMPONENTS
Only with tool

### TYPE OF FASTENING
Using the screws supplied

### INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

### INSTALLATION TYPE
Suitable for installing in any floor type, raised or concrete

### SCREWS REQUIRED FOR FLOOR FIXING
4

### REMOVAL OF TRIM FRAMES
Only with tool

## REGULATIONS

### REGULATIONS
Directive 2014/35/UE LVD + EN 50085-2-4:2009

## LOGISTICS INFORMATION

UNITARY EAN CODE
8421053094440

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
2.245

PRODUCT NET WEIGHT
2.245

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053094440

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
124

PACKAGING WIDTH
142

PACKAGING LENGTH
900

PACKAGING MEASUREMENT UNIT
MMT

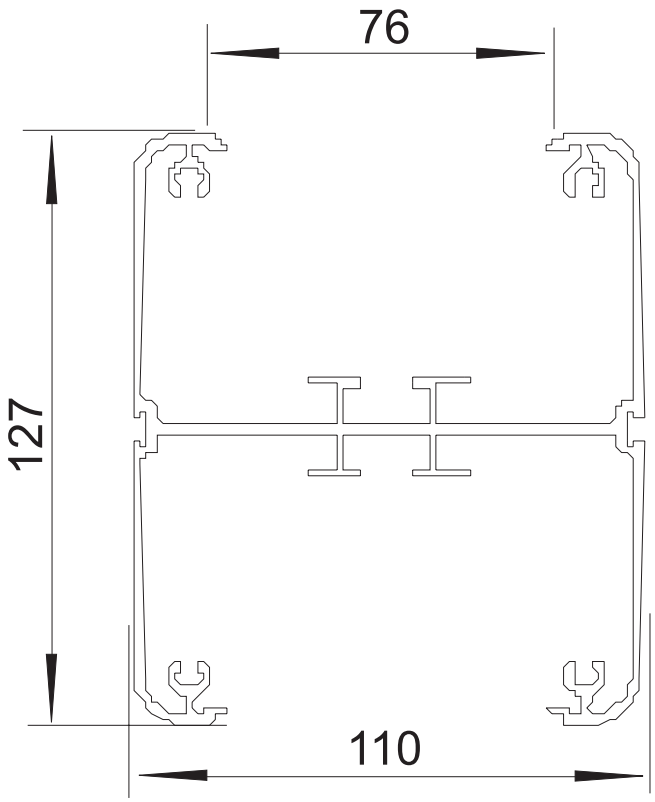
PACKAGING VOLUME
15847200

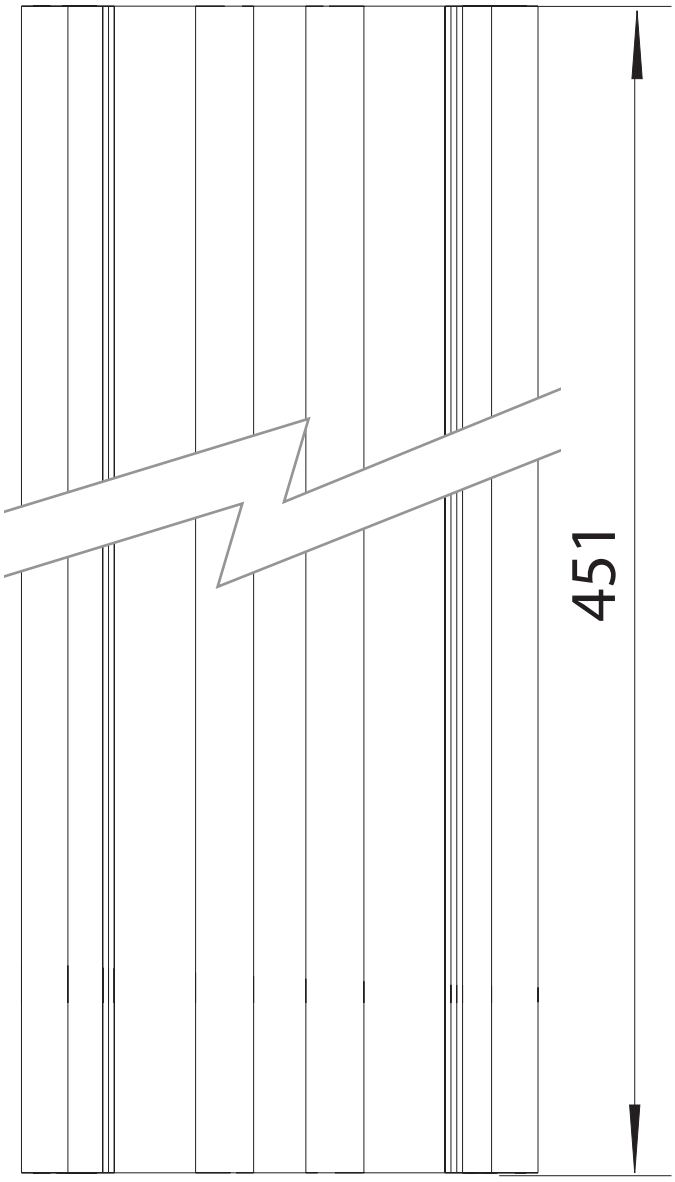
PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
2.245

PACKAGING WEIGHT UNIT
KGM


76
127
110


451