French double socket outlet 16A 250V~ with safety device and screw terminal connection pin unlocking red Simon 500 Cima

REF. **50000459-037**



BASIC INFORMATION

DESCRIPTION

With unlocking pin included, the French socket-outlet Simon 500 Cima double, provides the perfect balance between design, functionality and security adapted to any type of space. With finishes in a intense and original red tone, this socket-outlet has a design of neutral lines, ideal for working areas. With safety device included, it has a size of 100 x 50 mm and a depth of 46 mm Compatible with a power of 250 Volt voltage and 16 Ampere current, its installation is suitable for flush mounted or surface-mounted, with screw terminal connection, to ensure the integration of the set in all types of spaces. To protect your room in case of fire, it is made of metal materials isolated with self-extinguishing halogen-free thermoplastic that prevents flame spread and toxicity by smoke. Also, it can reach maximum temperatures of more than 60 ºC.

FINISH

Red

PACKAGING CONTENTS

Double socket outlet with cover and installation manual

ETIM CLASS

EC000125

COMPATIBILITY

Simon 500 Cima enclosures

REMARKS

The article includes the pins for unlocking the security shutters

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

NUMBER OF CONNECTIONS PER TERMINAL
2 connections per terminal

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

FORMAT
French

HEAT RESISTANCE (°C)
+125°C (according rule IEC 60695-10-2)

INDICATOR FUNCTION
No

INSULATION RESISTANCE (V-MΩ)
>5MOhms at 500V

CURRENT (A)
16 A

IP RATING
IP20

LINKABLE
Yes, using accessory 50000996-039

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-25 to 60 °C

TYPE OF MECHANISM
Insertion

NUMBER OF MODULES
2

MONOBLOCK
No

NOMINAL VOLTAGE (V~)
250 V~

RAL
3002

NUMBER OF SOCKETS
2

VERSION
Double

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
12

REMOVAL OF COVER
Only with tool

EXTINGUISHING (°C)
+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-10-2)

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Specific Simon 500 Cima

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
Suitable for surface and flush mounting

REMOVAL OF THE SOCKET
Only with tool

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Screw

NUMBER OF TERMINALS
3 inputs and 3 outputs

REGULATIONS

REGULATIONS

Dir. 2011/65/UE RoHS + post. mod.|EN IEC 63000:2018|IEC 60884-1 Ed. 3.2|UNE 20315-1-1:2017|UNE 20315-1-2:2017|DS 60884-2-D1:2023

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.11

PRODUCT NET WEIGHT
0.11

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053106389

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
0

PACKAGING WIDTH
0

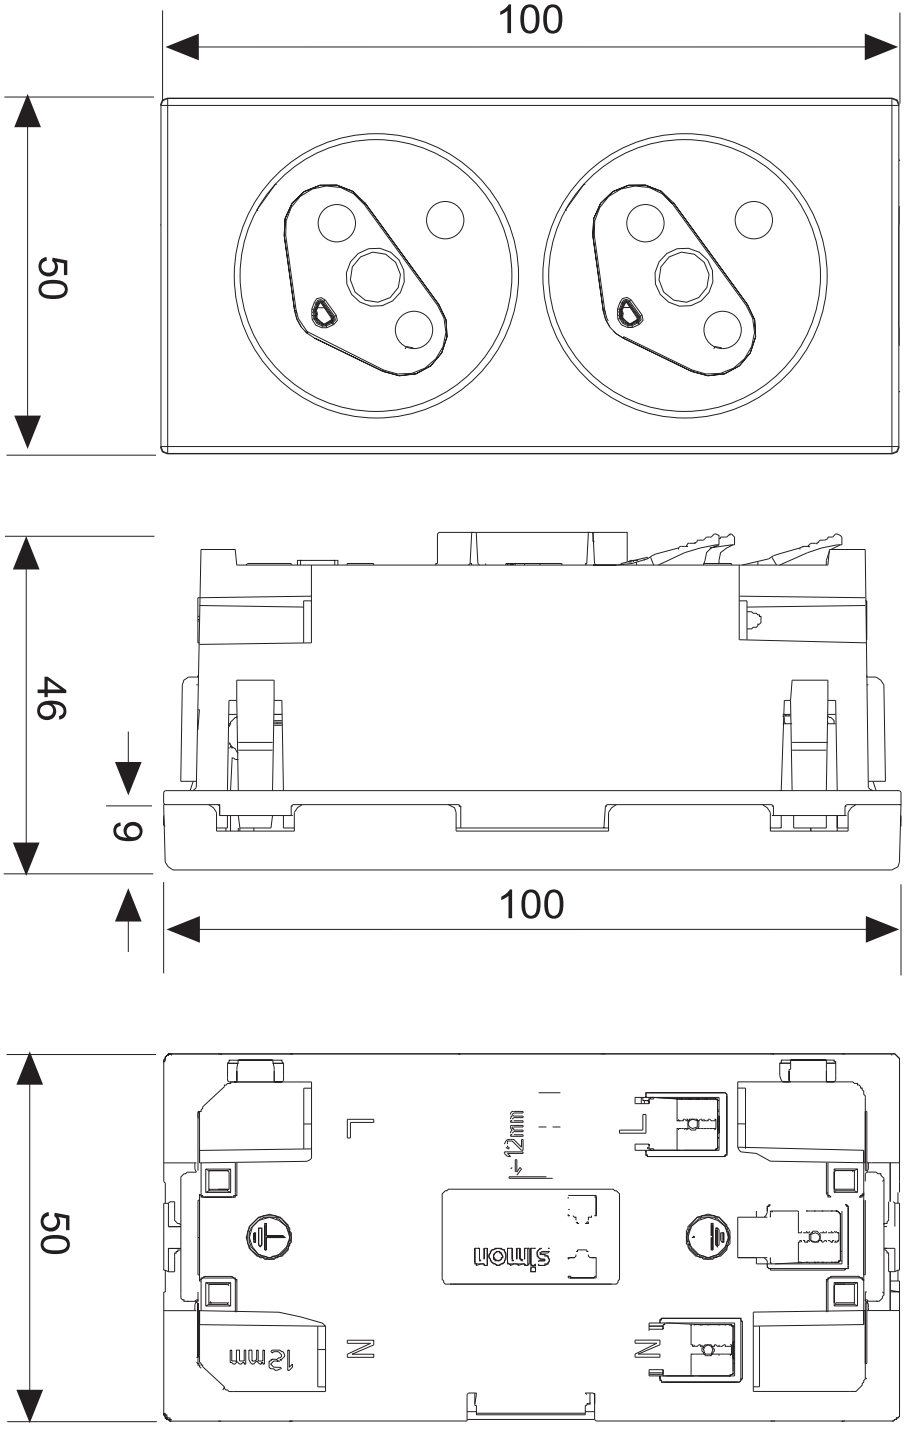
PACKAGING LENGTH
0

PACKAGING VOLUME
0

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
1.07

PACKAGING WEIGHT UNIT
KGM


100
50
46
9
100
50
12mm
L
N
N
12mm
simon