


IP66 mechanism holder unit with safety lock and a French socket base with 1 RJ45 category 5e UTP brass Simon K45

REF. KSE25USEC/23/71

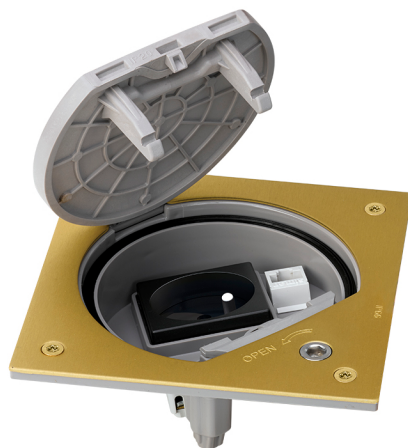

BASIC INFORMATION

FINISH

Brass

MATERIAL

Metal

ETIM CLASS

EC000024

TECHNICAL INFORMATION

DUST SHUTTER

No

CURRENT (A)

16 A

MAXIMUM LOAD (KG)

1000kg

FORMAT

French

IP RATING

IP66

RECESS DIMENSION (MM)

145 x 145 mm en falso suelo

HEAT RESISTANCE (°C)

+70°C (according to standard IEC 60670)

KIT AVAILABILITY

No

VOLTAGE (V~)

250 V~

INDICATOR FUNCTION

No

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

12

NUMBER OF COVER OPENING POSITIONS

1

EXTINGUISHING (°C)

+650 °C (according to standard IEC 60670)

CAN BE INSTALLED IN TRAY

Plástica

LOGISTICS INFORMATION

UNITARY EAN CODE

8426436063860

PRODUCT NET WEIGHT

0.46

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING VOLUME

1.445

UNITARY PACKAGING WIDTH

0

PACKAGING EAN

8426436063860

PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING LENGTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING VOLUME

0.3

PACKAGING HEIGHT

77

PACKAGING NET WEIGHT

0.46

UNITARY PACKAGING VOLUME UNIT

MMQ

PACKAGING WIDTH

137

PACKAGING WEIGHT UNIT

KGM

UNITARY PACKAGING GROSS WEIGHT

0.46

PACKAGING LENGTH

137