

Set of 1 2-way switch 10AX 250V~ and 1 push button 10A 250V~ with fast terminal connection system white Simon 31

REF. 31301-30



BASIC INFORMATION

DESCRIPTION

The control mechanisms allow us to commissioned a device in the most comfortable way whenever we want without having to perform any effort. A good ally in this sense is the group of 1 2-way switch 10AX 250V~ and 1 push-button switch 10A 250V~ with quick terminal connection system white in colour, included in the Simon 31 series. The push-button switch, whose dimensions are 64x65 mm, has a rocker operation. Available in 3 finishes, so Simon recommends choosing a frame the same colour as the rocker selected, this mechanism has been made with metal components with halogen-free thermoplastic insulation and thermo-stable trim that give it an extra quality, complying with the current regulation. It measures 64x65 mm, a cable section from 0.2 to 0.5 mm and stripping of 11 mm wire

FINISH

White

PACKAGING CONTENTS

Mechanism with rocker

COMPATIBILITY

Simon 31 frames

ETIM CLASS

EC002846

REMARKS

Available in 3 finishes. It is recommended to choose a frame the same colour as the selected rocker.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

10 AX

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CABLE SECTION ADMITTED (MM)

From 0,2 to 0,5 mm

IP RATING

IP20

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

NUMBER OF POSSIBLE ELEMENTS

1 element

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

VERSION

Single

INDICATOR FUNCTION

No

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

INSTALLATION TYPE

Suitable for surface and flush
mounting

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

UNE-EN 60669-1:2002 + A1:2003 + A2:2009

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.098

PACKAGING MEASUREMENT

UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT

UNIT

KGM

PACKAGING VOLUME

3026595

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8421053005880

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

3026595

UNITS CONTAINED PACKAGING

10

PACKAGING GROSS WEIGHT

0.98

UNITARY PACKAGING VOLUME

UNIT

MMQ

PACKAGING HEIGHT

83

PACKAGING NET WEIGHT

0.98

UNITARY PACKAGING GROSS

WEIGHT

0.098

PACKAGING WIDTH

165

PACKAGING WEIGHT UNIT

KGM

PACKAGING LENGTH

221

MECANISMOS SIMON 31, 75, 77, 82 Y 88


Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch
XXXX101-XXX




Interrupor unipolar / Single-pole switch
7700101-039




Pulsador / Push button switch
XXXX150-XXX




Pulsador / Push button switch
7700150-039

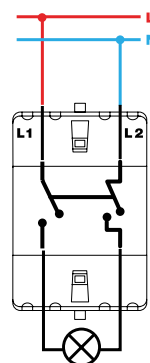

Interrupor bipolar / Double pole switch
XXXX133-XXX

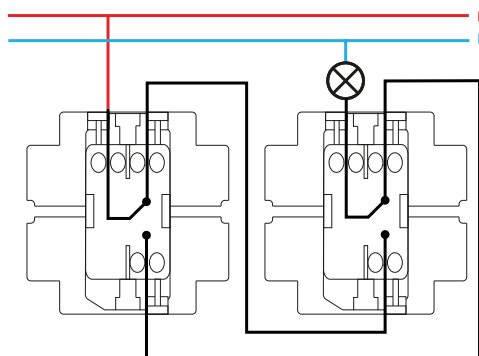

Conmutador / 2-way switch
XXXX201-XXX

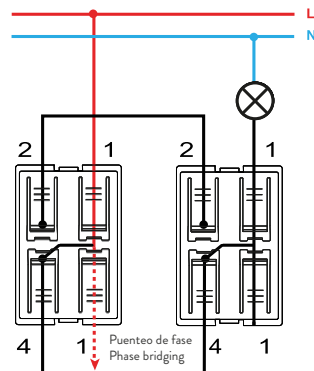

Conmutador / 2-way switch
7700201-039



Conmutador cruce / Intermediate switch
XXXX251-XXX



Conmutador cruce / Intermediate switch
7700251-039



Grupo 2 interruptores / 2 switches group
XXXX398-XXX



Pulsador desconexión / Push button disconnection switch
XXXX152-XXX



Grupo dos conmutadores / 2-way switches group
XXXX397-XXX



Grupo de pulsadores desconexión / Push button switch
disconnection group XXXX395-XXX



Grupo conmutador y pulsador / 2-way and push button switch group
XXXX301-XXX



Interrupor unipolar / Single-pole switch
XXXX102-XXX



Interrupor con piloto / Push button pilot switch
7700112-039



Interrupor bipolar / Double pole switch
XXXX134-XXX



Conmutador / 2-way switch
XXXX202-XXX



Interrupor unipolar con luminoso / Single-pole switch with light
XXXX104-XXX



Pulsador con luminoso / Push button switch with light
XXXX160-XXX



Pulsador con luminoso / Push button switch with light
7700160-039



Conmutador con luminoso / 2-way switch with light
XXXX204-XXX



Conmutador cruce con luminoso / Intermediate switch with light
XXXX254-XXX