


Complete 2-way switch kit 10AX 230V~ IP44 with fast terminal connection system white Simon 270

REF. 20000951-090

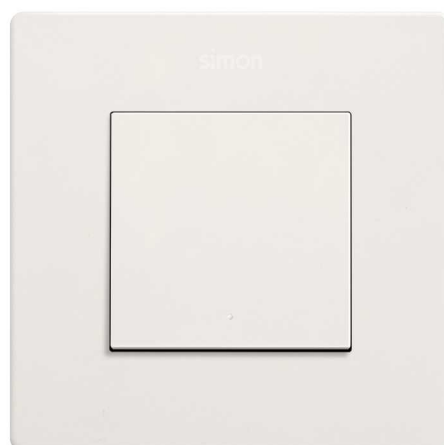

BASIC INFORMATION

FINISH

White

TYPE OF ROCKER

Large

MATERIAL

Plastic

COMPATIBILITY

Simon 270 frames

PACKAGING CONTENTS

Mechanism, cover and instruction sheet

ETIM CLASS

EC001590

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

FREQUENCY

50 - 60 Hz

TYPE OF MECHANISM

Pivoting

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

INDICATOR FUNCTION

No

OPERATING TEMPERATURE

RANGE (°C)

5 - 45 °C

TYPE OF COVER

Large

CURRENT (A)

10 AX

STORAGE TEMPERATURE RANGE

(°C)

-25 - 75 °C

NUMBER OF POSSIBLE ELEMENTS

1 element

IP RATING

IP20

VOLTAGE (V~)

127/230 V~

FORMAT

Fast

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

7

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Suitable for flush mounting

INSTALLATION DIRECTION

Horizontal, Vertical

TYPE OF TERMINAL

CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053284148

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.055

PRODUCT NET WEIGHT

0.055

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053284148

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

75

PACKAGING WIDTH

96

PACKAGING LENGTH

128

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

481750

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0

PACKAGING NET WEIGHT

0.055

PACKAGING WEIGHT UNIT

KGM

