


## SLIM SYSTEM modular luminaire 3000K Symmetrical op 1.5 m OBD Black

REF. 91772605-388

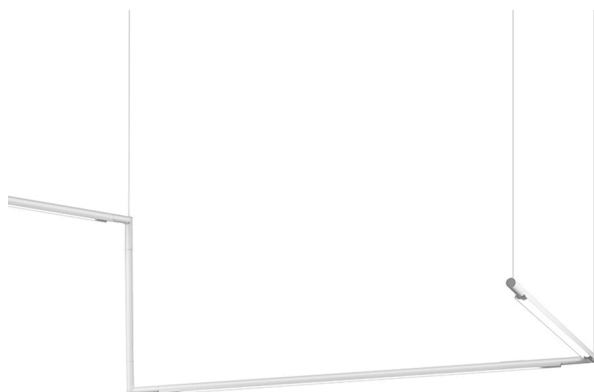

### BASIC INFORMATION

#### FINISH

Black

#### APPLICATION

Domestic, Office, Retail, Hotel, Contract

#### PACKAGING DIMENSIONS (MM)

1465x85x85 mm

#### BODY MATERIAL

Aluminium

#### PACKAGING CONTENTS

1 unit

#### ETIM CLASS

EC001743

## TECHNICAL INFORMATION

### FREQUENCY

50 - 60 Hz

### IP RATING

IP20

### OPERATING TEMPERATURE RANGE (°C)

0 - 35 °C

### POWER SUPPLY (V~)

48 Vdc

### RAL

9005

### COLOR TEMPERATURE (K)

3000 K

### CONTROL

On Board Dimmer

### CRI

90

### DIRECTIONAL

Yes

### DRIVER INCLUDED

No

### ELECTRICAL CLASS

III

### ENERGY EFFICIENCY

A+

### COLOR TYPE

NW

### LIGHTING EFFICIENCY (LM/W)

Up to 82 lm/W

### LUMENS (LM)

4360 lm

### NUMBER OF LUMINAIRES

1

### MACADAM STEPS

<3 Step MacAdam

### OPTICS

Symmetric

### POWER (W)

56 W

### CHROMATICS CRI ICONS

CRI  
90

## INSTALLATION AND MAINTENANCE

### INSTALLATION TYPE

Suspended

## REGULATIONS

### WARRANTY

5 years

## LOGISTICS INFORMATION

### UNITARY EAN CODE

8436547050390

### UNITARY PACKAGING HEIGHT

0

### UNITARY PACKAGING WIDTH

0

### UNITARY PACKAGING LENGTH

0

### UNITARY PACKAGING VOLUME

0

### UNITARY PACKAGING GROSS WEIGHT

1.08

### PRODUCT NET WEIGHT

0.7

### UNITARY PACKAGING WEIGHT UNIT

KGM

### PACKAGING EAN

8436547050390

### UNITS CONTAINED PACKAGING

1

### PACKAGING HEIGHT

85

### PACKAGING WIDTH

85

### PACKAGING LENGTH

1465

### PACKAGING MEASUREMENT UNIT

MMT

### PACKAGING VOLUME

10584625

### PACKAGING VOLUME UNIT

MMQ

### PACKAGING GROSS WEIGHT

1.08

### PACKAGING NET WEIGHT

0.7

### PACKAGING WEIGHT UNIT

KGM