


90° positioner for vertical positioning of the plates for 1 element Simon K45

REF. K66

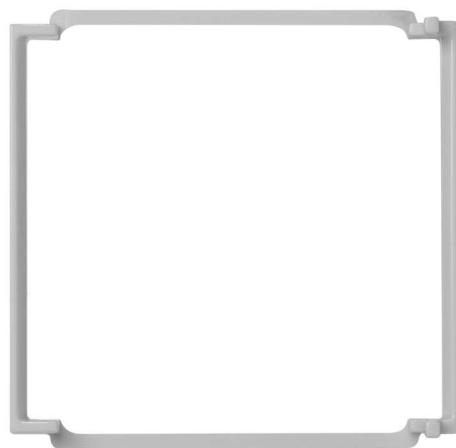

BASIC INFORMATION

DESCRIPTION

The Brand Simon through Simon Connect and its Simon K45 range, offering solutions for all types of installations, allows you absolute compatibility with the rest of the connectors on the market, and is a long term solution for your connectivity needs. If necessary the correct inclination of the placed plates, Simon offers you this complement that places the housings in the correct position. In accordance with rigorous safety standards, not only for people, but also for the Voice, Data and Multimedia equipment, which are installed with the K45 range. This is the additional 90 ° positioner for placing the plates of Simon K45 of 1 element in a vertical position. Finished in grey. Thermoplastic material fireproof. Allows you to adapt the voice and data plate in vertical housing (K45 TELEBLOCK, mini columns K45, K45 columns and mechanism holder trunking direct snap-fit K45 installed in vertical position) to correct the orientation of the plates. Dimensions 43,5 x 44,5 x 13 mm halogen-free thermoplastic that guarantees no flame propagation in case of fire and low toxicity in case of smoke. It meets strict safety standards: UNE-EN 60669-1:2002 + A1:2003 + A2:2009. Suitable for surface mounting and flush mounting. It withstands extreme temperatures (-5 to +60 °C).

FINISH

Grey

COMPATIBILITY

Simon K45 voice and data plates

ETIM CLASS

EC002649

MATERIAL

Plastic

PACKAGING CONTENTS

90° positioner for placing the plates vertically

REMARKS

Enables the voice and data plates to be adapted to vertical enclosures (K45 Teleblock, K45 mini columns; K45 columns and K45 direct snap-fit mechanism-holder trunking installed vertically) to correct the orientation of the plates.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60° C

INDICATOR FUNCTION

No

IP RATING

IP20

KIT AVAILABILITY

Yes

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60° C

RAL

7035

INSTALLATION AND MAINTENANCE

TYPE OF FASTENING

Fixing by direct snap-fit, no tools needed

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

INSTALLATION TYPE

Suitable for surface and flush mounting

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60670-1:2005

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.003

PACKAGING MEASUREMENT

UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT

UNIT

KGM

PACKAGING VOLUME

455000

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8426436036956

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

0.3

UNITS CONTAINED PACKAGING

20

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING VOLUME

UNIT

MMQ

PACKAGING HEIGHT

65

PACKAGING NET WEIGHT

0.06

UNITARY PACKAGING GROSS
WEIGHT

0.003

PACKAGING WIDTH

70

PACKAGING WEIGHT UNIT

KGM

PACKAGING LENGTH

100