


Bus coupling unit with KNX system

REF. 8400100-039

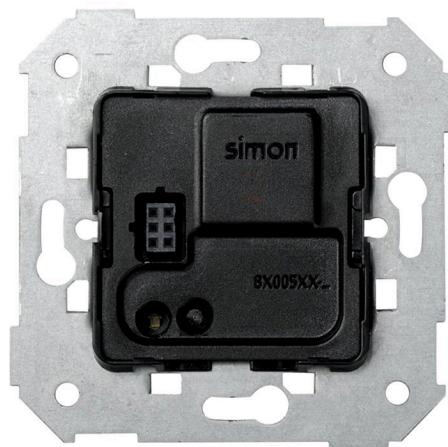

BASIC INFORMATION

PACKAGING CONTENTS

Coupling unit and instructions

ETIM CLASS

EC000634

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

INPUT TYPE

Digital, volt-free

POWER SUPPLY (V~)

Bus KNX (21 Vcc...32 Vcc)

NUMBER OF POSSIBLE ELEMENTS

1 element

CURRENT (A)

34 mA

PROTOCOL

KNX

INDICATOR FUNCTION

No

IP RATING

IP20

PROGRAMMING PUSH BUTTON

Yes

INPUT CABLE SECTION ADMITTED (MM)

From 0.5 to 2.5 mm

MAXIMUM VOLTAGE AT THE INPUT (VCC)

24 V DC

RELATIVE HUMIDITY

From 20 to 85% (without condensation)

INPUT INTENSITY (MA)

6

OPERATING TEMPERATURE RANGE (°C)

0 - 45 °C

STORAGE TEMPERATURE RANGE (°C)

25 - 70 °C

INSTALLATION AND MAINTENANCE

BUS CABLE SECTION ADMITTED (MM)

From 0.5 to 0.8 mm

CABLE STRIPPING NECESSARY (MM)

8

INSTALLATION TYPE

Suitable for surface and flush mounting

BUS CONNECTION TYPE OF TERMINAL CONNECTION

Por inserción

CLAW

Optional

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2014/30/UE EMC + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-2-5:2016

LOGISTICS INFORMATION

UNITARY EAN CODE	UNITARY PACKAGING WEIGHT UNIT	PACKAGING MEASUREMENT UNIT
8421053129265	KGM	MMT
UNITARY PACKAGING HEIGHT	PACKAGING EAN	PACKAGING VOLUME
0	8421053129265	0.329
UNITARY PACKAGING WIDTH	UNITS CONTAINED PACKAGING	PACKAGING VOLUME UNIT
0	1	DMQ
UNITARY PACKAGING LENGTH	PACKAGING HEIGHT	PACKAGING GROSS WEIGHT
0	57	0.09
UNITARY PACKAGING VOLUME	PACKAGING WIDTH	PACKAGING NET WEIGHT
0	76	0.08
UNITARY PACKAGING GROSS WEIGHT	PACKAGING LENGTH	PACKAGING WEIGHT UNIT
0.08	76	KGM
PRODUCT NET WEIGHT		
0.08		