

SLIM mini wall-mounted luminaire 4000 K Symmetric Optics White

REF. 90012110-400



BASIC INFORMATION

BODY MATERIAL

Die-cast aluminium

PACKAGING CONTENTS

1 Unit

ETIM CLASS

EC002892

APPLICATION

Domestic, Office, Retail, Hotel, Contract

PACKAGING DIMENSIONS (MM)

69x860x175 mm

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

DIRECTIONAL

Yes

LUMENS (LM)

1300 lm

IP RATING

IP20

DRIVER INCLUDED

Yes

NUMBER OF LUMINAIRES

1

OPERATING TEMPERATURE RANGE (°C)

0 - 40 °C

ELECTRICAL CLASS

II

MACADAM STEPS

<3 Step MacAdam

POWER SUPPLY (V~)

230 V~

ENERGY EFFICIENCY

A+

OPTICS

Symmetric

RAL

9016

L70 (°C)

100000h at 25°C

PHOTOBIOLOGICAL CLASSIFICATION

Class II

COLOR TEMPERATURE (K)

4000 K

L90 (°C)

30000h at 25°C

POWER FACTOR (Φ)

> 0,9

CONTROL

On/Off

COLOR TYPE

CW

POWER (W)

16 W


CRI

80

LIGHTING EFFICIENCY (LM/W)

hasta 78 lm/W

PHOTOMETRY ASSETS - POLAR

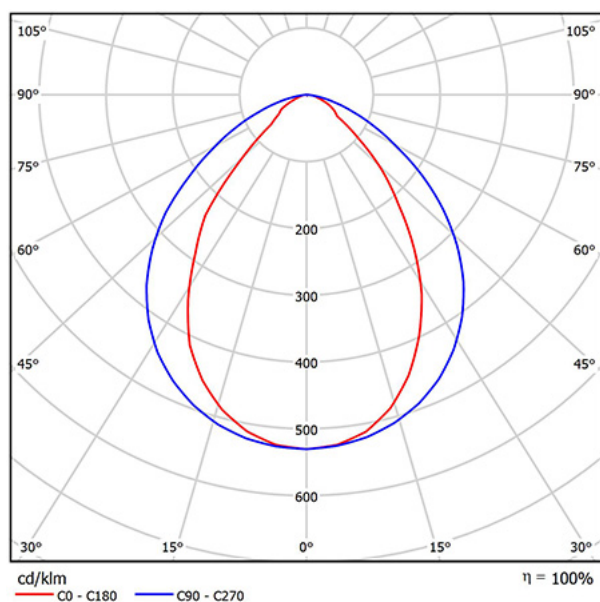

INSTALLATION AND MAINTENANCE

INSTALLATION ALTERNATIVES

Suspended, Table-top, Free-standing

INSTALLATION TYPE

Wall-mounted

REGULATIONS

EAC MARKED

Yes

ECORRAE MARKED

Yes

WARRANTY

5 years

LOGISTICS INFORMATION

UNITARY EAN CODE

8436547039807

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8436547039807

PACKAGING VOLUME

10535000

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

69

PACKAGING GROSS WEIGHT

0.88

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

175

PACKAGING NET WEIGHT

1.32

UNITARY PACKAGING GROSS
WEIGHT

1.56

PACKAGING LENGTH

860

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

1.32