
Voice and data angled plate with dust cover for 1 element and 1 RJ45 connector category 5e UTP black Simon K45

REF. **K8095U/14**

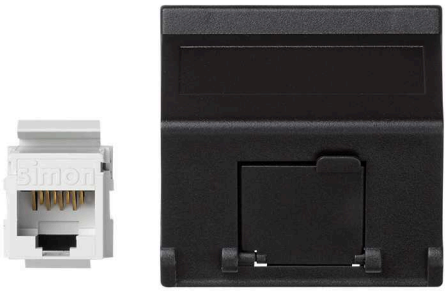

BASIC INFORMATION

DESCRIPTION

Within the collection Simon K45 connectors and plates for voice and data connections, is the angled plate with dust cover with 1 element and 1 RJ45 connector of category 5e UTP, to offer the greatest innovation and functionality in the workplace solutions of their spaces with discreet finishes in black. Compatible with ports type Keystone I and II, and is suitable for installation on the surface-mounted or recessed, the RJ45 connector is clipped directly to the plate without the need for tools of screws. This K45 angled plate, is made up of metal materials with halogen-free thermoplastic insulation and halogen free halogeneous to increase its security against fires, with a temperature range of installation of -5ºC and 60 ° C The angled voice and data plate K45, it is fully compatible with any connector of the market, increasing the possibilities of the product, depending on the needs of each space. Versatility, functionality and innovation in the collection Simon K45.

FINISH

Black

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-038)

PACKAGING CONTENTS

Angled voice and data plate with dust cover, direct module for snap-fit connector, RJ45 category 5e UTP connector and installation manual

ETIM CLASS

EC000018

REMARKS

When combining the voice and data plate in vertical housings (mini columns, columns, Teleblock, channels, mechanism holders, etc.) you must use the 90º positioner (ref. K66) to guide the plate into a vertical position.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
22-26 AWG wiring

RJ45 CONNECTION
With insertion tool

CONNECTOR CHARACTERISTICS
Category 5e UTP

RJ45 CONNECTORS
Included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60° C

DUST PROTECTION
Yes

FORMAT
RJ45

IP RATING
IP20

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60° C

NUMBER OF MODULES
Half

PLATE TYPE
Angled

RAL
7021

RJ45 ADAPTOR MODULE
Supplied with the voice and data plate

SNAP-FIT RJ45 PLATES
Keystone I, II, ATT®/Avaya®

SNAP-FIT TYPE
Keystone I, II, ATT®/Avaya®

VERSION
Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-038)

INSTALLATION DIRECTION
Vertical according to the direction of the mechanisms

INSTALLATION TYPE
Suitable for surface and flush mounting

REMOVAL OF THE PLATE
Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

287138

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.026

PRODUCT NET WEIGHT

0.026

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8426436040250

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

95

PACKAGING WIDTH

155

PACKAGING LENGTH

195

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

2871375

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.26

PACKAGING NET WEIGHT

0.26

PACKAGING WEIGHT UNIT

KGM