2-way switch monoblock IP55 10AX 250V~ with fast terminal connection system grey Simon 44 Aqua

REF. **4490201-035**



BASIC INFORMATION

DESCRIPTION

Are you looking for solutions for rooms where there is a risk of contact with water, dust and all kinds of outdoor areas? Simon has solutions for all types of cases and problems municipalities face. The series Simon 44 Aqua is a good example. In this collection, Simon brings a enclosure waterproof mission is to protect the water or dust protection to all types of mechanisms in one of the collections more required of the brand, the Simon 27. It also includes a wide range of features. If you need a 2-way switch, here you have this 2-way switch in monoblock form (IP55 10 Amps 250 Volt) with quick terminal connection and finished in grey of the series that we presented, the Simon 44 Aqua. In its manufacture are tapped different metal materials, always with halogen-free insulation. The trim made of thermoplastic, the dimensions of this 2-way switch are 84 x 75 millimetres, being its installation very simple.

FINISH

Grey

COMPATIBILITY

Simon 27 mechanisms

PACKAGING CONTENTS

Mechanism, socket and frame with rocker

ETIM CLASS

EC001590

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

NUMBER OF POSSIBLE ELEMENTS
1 element

IK CLASSIFICATION
07

INDICATOR FUNCTION
No

CURRENT (A)
10 AX

IP RATING
IP55

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM
Pivoting

MONOBLOCK
Yes

NOMINAL VOLTAGE (V~)
250 V~

OPERATING TEMPERATURE RANGE (°C)
5 - 40 °C

RAL
7035

STORAGE TEMPERATURE RANGE (°C)
-25 - 50 °C

VERSION
Single

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
11

INSTALLATION DIRECTION
Vertical

INSTALLATION TYPE
Suitable for surface mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Fast

REGULATIONS

REGULATIONS
Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018*1 | IEC 60884-1 Ed. 3.2*2 | UNE 20315-1-1:2017*2 | UNE 20315-1-2:2017*2 | EN IEC 60670-1:2021 + A11:2021*3 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.145

PRODUCT NET WEIGHT
0.145

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053069882

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
86

PACKAGING WIDTH
155

PACKAGING LENGTH
306

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
4.079

PACKAGING VOLUME UNIT
DMQ


PACKAGING GROSS WEIGHT
1.45

PACKAGING NET WEIGHT
1.45


PACKAGING WEIGHT UNIT
KGM

MECANISMOS SIMON 27, 28 Y 44


Mecanismos básicos / Basic switches




Interruptor unipolar / Single-pole switch
XX00101-XX




Pulsador / Push button switch
XX00150-XX



Interruptor bipolar / Double pole switch
XX00133-XX




Conmutador / 2-way switch
XX00201-XX

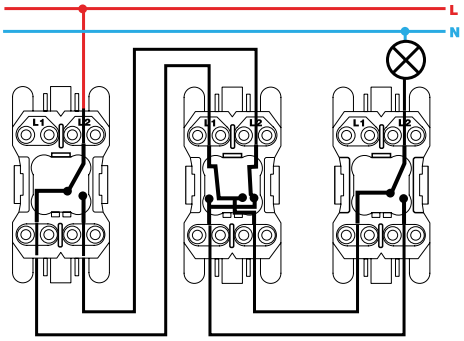


Conmutador cruce / Intermediate switch
XX00251-XX


Mecanismos con piloto / Pilot switches



Interruptor unipolar / Single-pole switch
XX00102-XX




Interruptor bipolar / Double pole switch
XX00134-XX

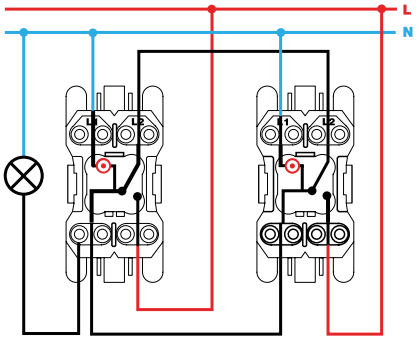


Conmutador / 2-way switch
XX00202-XX


Mecanismos con luminoso / Switches with light




Interruptor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX

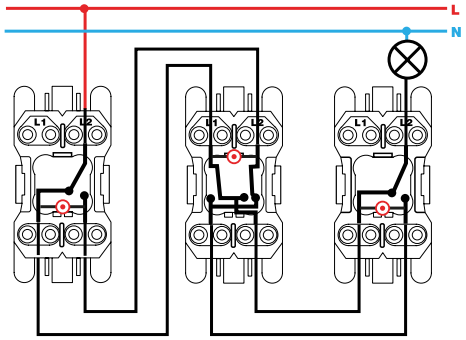

Conmutador cruce / Intermediate switch
XX2700254-XX