


**Mechanism-holder unit IP66 with manual lock and Italian
socket P40 socket outlet with 1 RJ45 category 5e UTP
stainless steel Simon K45**

REF. KSE35U/23/72

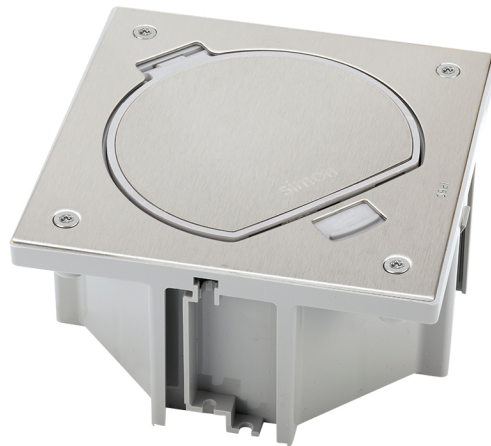

BASIC INFORMATION

DESCRIPTION

It is a mechanism-holder unit with manual closure and Italian P40 socket outlet with 1 category 5e UTP RJ45 made in stainless steel included in the series Simon K45. With dimensions of 130 x 130 x 55 mm, it consists of two modules and 1 element has a screw terminal connection and, in addition, it has anchor points to protect the connections during use against pressures and stresses caused by the traffic of people. The unit mechanism-holders made of stainless steel on in halogen-free thermoplastic baseboard and autoextinguible, a material very safe in case of fire, prevent the propagation of the fire. Due to its design, it can be installed both in raised floor and concrete floor. However, remember to choose a tray in accordance with the type of floor: Reference KGE170 for concrete floor, and reference KGE170TF for raised floor. For the maintenance of this piece, use a soft, dry cloth. With the range update, its equivalent for the new version is the KFH115U/72 reference.

FINISH

Stainless steel

MATERIAL

Stainless steel

ETIM CLASS

EC000024

REMARKS

The cover has anchor points that protect the connections during use against pressures and stresses due to the passage of personnel.

TECHNICAL INFORMATION

NUMBER OF CONNECTORS

1

INDICATOR FUNCTION

No

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

DUST SHUTTER

No

CURRENT (A)

16 A

FORMAT

Italian

IP RATING

IP66

RECESS DIMENSION (MM)

145 x 145 mm en suelo técnico

IK CLASSIFICATION

07

VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

12

REMOVAL OF COMPONENTS

Only with tool

NUMBER OF COVER OPENING POSITIONS

1

REMOVAL OF COVER

Only with tool

EXTINGUISHING (°C)

+650 °C (according to standard IEC 60670)

REMOVAL OF THE FRAME

Only with tool

CAN BE INSTALLED IN TRAY

Plastic

REMOVAL OF THE SOCKET

Only with tool

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053333877

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.446

PRODUCT NET WEIGHT

0.372

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053333877

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

82

PACKAGING WIDTH

147

PACKAGING LENGTH

155

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

1445213

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.446

PACKAGING NET WEIGHT

0.372

PACKAGING WEIGHT UNIT

KGM