


Flush-mount trim cover for adjustable floor box or service cover 12 elements graphite Simon 500 Cima

REF. 52053106-038

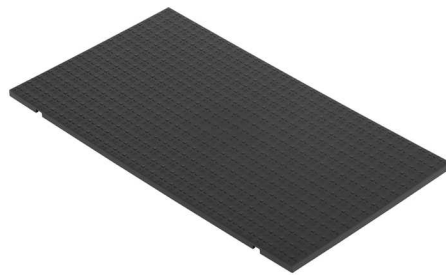

BASIC INFORMATION

DESCRIPTION

The adjustable floor box of the Simon 500 Cima series is designed for installation in a very simple way in concrete floor, although it is also possible to integrate into a raised floor. The box supplied energy to a total of 12 elements or equipment and has dimensions of 225 x 310 millimetres and 76 millimetres of depth. It comes in an innovative graphite colour that will give a touch of modernity to any room of the home, office or place where it is installed. To complete the correct installation of the box you must combine it, once configured, with a plastic tray reference Simon 52052106-035. Also, if you choose to not install the same floor covering, Simon suggests complementing the set with the flush-mount trim cover reference 52053106-038. The box is manufactured with metal components with self-extinguishing and halogen-free thermoplastic insulation. This high quality material gives resistance to the product but above all, safety, because it does not contribute to flame spread in case of fire and reduces the toxicity of smoke.

FINISH

Graphite

PACKAGING CONTENTS

Trim cover

MATERIAL

Plastic

ETIM CLASS

EC002417

REMARKS

Optional element. To combine with the floor box if not installing the same floor finish.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IK CLASSIFICATION

08

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

AVAILABLE IN

2, 4, 6, 8 and 12 elements

INSULATION RESISTANCE (V-MΩ)

>5 MOhms at 500V

NUMBER OF MODULES

12 modules

DIELECTRIC STRENGTH

No holes or contours, with 2000V at 50 Hz for 1 minute

IP RATING

IP4X

RAL

7021

MAX TEMP DURING CONSTRUCTION WORK (°C)

+90 °C

KIT AVAILABILITY

No

VERSION

12 elements

HEAT RESISTANCE (°C)

+125°C (according rule IEC 60695-10-2)

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER

Only with tool

TYPE OF FASTENING

Using the screws supplied

INSTALLATION TYPE

In raised or concrete floor with adjustable floor boxes or service covers

EXTINGUISHING (°C)

+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

INSTALLATION DIRECTION

Horizontal, Vertical

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053254899

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.218

PRODUCT NET WEIGHT

0.218

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053101575

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

75

PACKAGING WIDTH

165

PACKAGING LENGTH

290

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

7.483

PACKAGING VOLUME UNIT

DMQ

PACKAGING GROSS WEIGHT

0

PACKAGING NET WEIGHT

2.18

PACKAGING WEIGHT UNIT

KGM

