Aluminium mini column with 2 sides for 10 elements per side white Simon 500 Cima

REF. **52550225-030**



BASIC INFORMATION

DESCRIPTION

If you are looking for the maximum workplace solutions without neglecting style, the range Simon 500 Cima in mini-columns, it is the ideal option to ensure functionality and innovation in its workspace. With 2 sides and capacity for 10 elements in each, the mini-column 500 Cima, it is made of painted Aluminium and with finishes in a intense white colour that promotes the integration into the set of the space. With the versatility of being able to be installed both in raised floor and concrete floor and a dimension 709 x 110 x 127 mm, the mini-column 500 Cima presents a way to baseboard that allows integration with the floor trunking (85 x 18 mm) ease and speed of assembly that adapts to the needs of each space technical and aesthetics. Maximum workplace solutions and functionality in the minimum space in this mini column of Alumnio/Exalumno within the collection Simon 500 Cima.

FINISH

White

MATERIAL

Aluminium

COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using an adaptor)

PACKAGING CONTENTS

Mini column, baseboard, lower and upper trim, non-slip adhesive foam, fixing studs, ground connection cable, screws and installation manual

ETIM CLASS

EC001941

REMARKS

The shape of the baseboard allows integration of the mini column with the 85 x 18 mm floor trunking

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

AVAILABLE IN
1 and 2 sides

MAX TEMP DURING CONSTRUCTION WORK (°C)
+120 °C

EARTHING RESISTANCE
< 0.05 Ohms

ELECTRICAL PROPERTIES
With electrical continuity

ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Constant clearance between electric wiring and Voice, Data and Multimedia cables, eliminating electromagnetic interference and possible transmission errors.

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-25 to +120 °C

NUMBER OF MODULES
10 per side

RAL
9003

VERSION
2 sides

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS
Only with tool

TYPE OF FASTENING
Using the screws supplied

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Suitable for installing in any floor type, raised or concrete

SCREWS REQUIRED FOR FLOOR FIXING
4

REMOVAL OF TRIM FRAMES
Only with tool

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 50085-2-4:2009

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053094471

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
3.165

PRODUCT NET WEIGHT
3.165

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053094471

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
124

PACKAGING WIDTH
142

PACKAGING LENGTH
900

PACKAGING MEASUREMENT UNIT
MMT

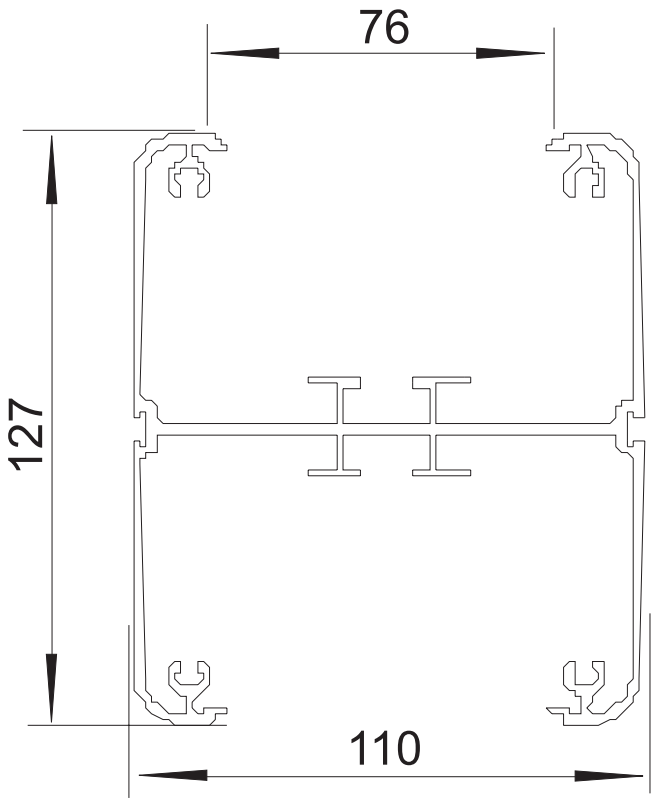
PACKAGING VOLUME
20601360

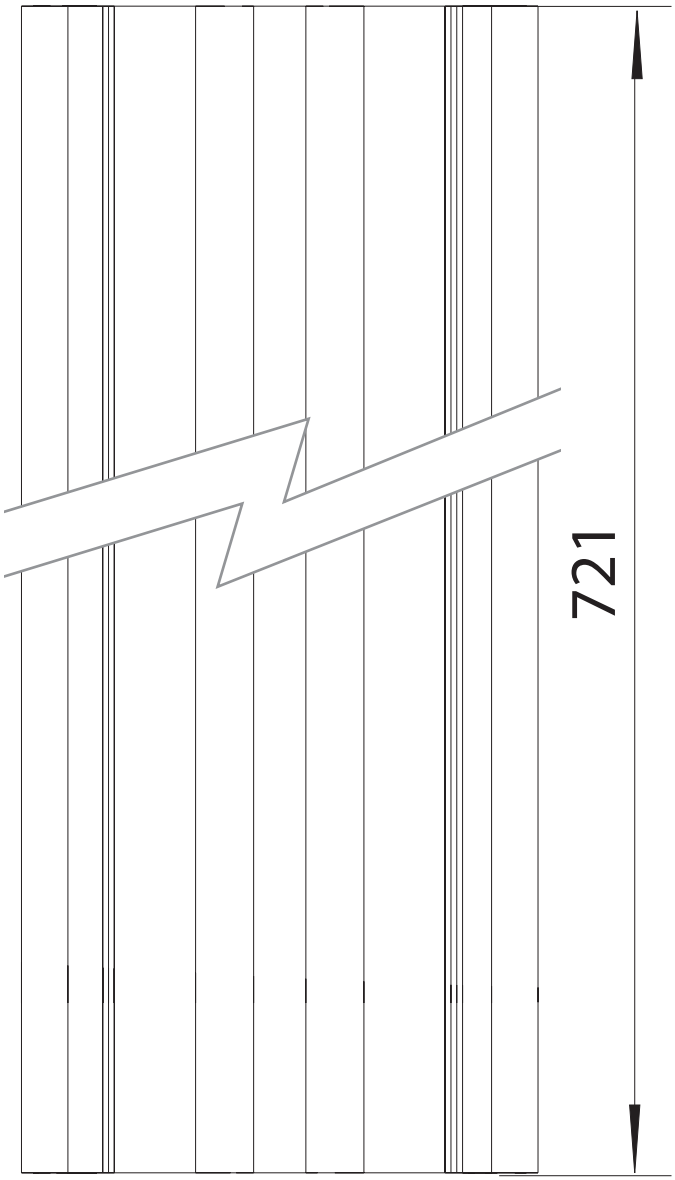
PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
3.165

PACKAGING WEIGHT UNIT
KGM


76
127
110


721