
Voice and data angled plate with dust cover for 1 element and 1 RJ45 connector category 5e FTP black Simon K45

REF. **K8095F/14**

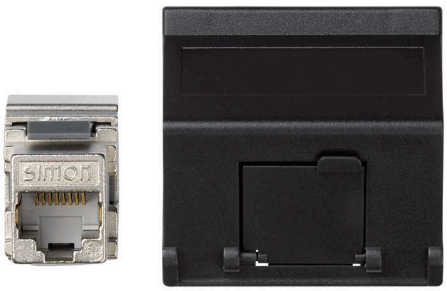

BASIC INFORMATION

DESCRIPTION

The plate of voice and data tilted plate with dust cover for an element of the collection Simon K45, is the solution to ensure the electromagnetic compatibility, total that demand the market thanks to its RJ45 connector of category 5e FTP. With elegant and discreet finishes in black, the angled voice and data plate K45, is made up of self-extinguishing halogen-free thermoplastic to protect your room of the flame spread and smoke fire. With a discrete design, its installation does not require tools screws and guarantees, in addition, an optimal bending radius in the data installations. The RJ45 connector is clipped directly to the plate, but its assembly requires the module multimedia (MD) corresponding to ensure maximum functionality. With a temperature range of installation of between -5ºC and 60 ° C, the plate of voice and data tilted plate Simon K45, suitable for installation in surface-mounted or recessed, gives the product versatility, functionality and innovation.

FINISH

Black

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-038)

PACKAGING CONTENTS

Angled voice and data plate with dust cover, direct module for snap-fit connector, RJ45 category 5e UTP connector and installation manual

ETIM CLASS

EC000018

REMARKS

When combining the voice and data plate in vertical housings (mini columns, columns, Teleblock, channels, mechanism holders, etc.) you must use the 90º positioner (ref. K66) to guide the plate into a vertical position.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
22-24 AWG wiring

RJ45 CONNECTION
With insertion tool

CONNECTOR CHARACTERISTICS
Category 5e FTP

RJ45 CONNECTORS
Included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60° C

DUST PROTECTION
Yes

FORMAT
RJ45

IP RATING
IP20

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60° C

NUMBER OF MODULES
Half

PLATE TYPE
Angled

RAL
7021

RJ45 ADAPTOR MODULE
Supplied with the voice and data plate

SNAP-FIT RJ45 PLATES
Keystone I, II, ATT®/Avaya®

SNAP-FIT TYPE
Keystone I, II, ATT®/Avaya®

VERSION
Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-038)

INSTALLATION DIRECTION
Vertical according to the direction of the mechanisms

INSTALLATION TYPE
Suitable for surface and flush mounting

REMOVAL OF THE PLATE
Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0.3

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.033

PRODUCT NET WEIGHT

0.033

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8426436040298

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

95

PACKAGING WIDTH

155

PACKAGING LENGTH

195

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

2871375

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.26

PACKAGING NET WEIGHT

0.33

PACKAGING WEIGHT UNIT

KGM