


**Mechanism-holder unit IP66 with manual lock and Italian
socket P40 socket outlet for Keystone RJ45 connector brass
Simon K45**

REF. KSE30U/23/71

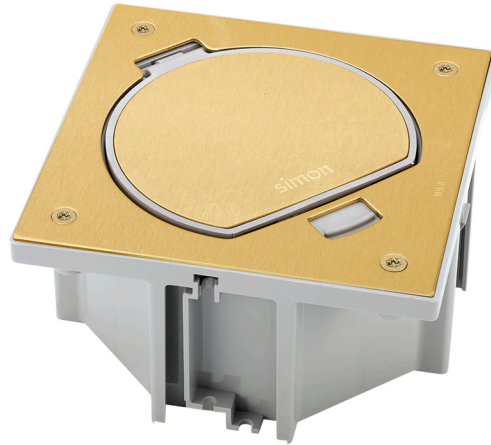

BASIC INFORMATION

DESCRIPTION

The unit mechanism-holders IP66 account both with manual closure as with socket outlet for standard current circuit plug for an RJ45 connector Keystone. This piece is part of the series Simon K45 and has dimensions of 130x130x55 mm and excellent finishes in brass. This is a piece made of thermoplastic components coated with halogen-free thermoplastic, a material with self-extinguishing qualities that guarantees no flame spread in case of fire and a very low toxicity in the event of a fire or smoke. Moreover, its unique design allows incorporation in any type of floor, both floor and concrete floor and has anchor points to protect the connections pressures and stresses that may occur due to the passage of personnel. You will find quality and forefront at your fingertips in all the products of the collection Simon K45, one of the most advanced functions, at Simon we know the concern of our customers due to give your home the maximum security. For this reason, we cheer to which trust in our wide experience and you comply with less.

FINISH

Brass

MATERIAL

Metal

ETIM CLASS

EC000024

REMARKS

The cover has anchor points that protect the connections during use against pressures and stresses due to the passage of personnel.

TECHNICAL INFORMATION

NUMBER OF CONNECTORS

1

INDICATOR FUNCTION

No

DUST SHUTTER

No

CURRENT (A)

16 A

FORMAT

Italian

IP RATING

IP66

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

RECESS DIMENSION (MM)

145 x 145 mm en suelo técnico

IK CLASSIFICATION

07

VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

12

REMOVAL OF COMPONENTS

Only with tool

NUMBER OF COVER OPENING POSITIONS

1

REMOVAL OF COVER

Only with tool

EXTINGUISHING (°C)

+650 °C (according to standard IEC 60670)

REMOVAL OF THE FRAME

Only with tool

CAN BE INSTALLED IN TRAY

Plastic

REMOVAL OF THE SOCKET

Only with tool

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053333846

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.47

PRODUCT NET WEIGHT

0.396

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053333846

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

82

PACKAGING WIDTH

17

PACKAGING LENGTH

155

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

1032295

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.47

PACKAGING NET WEIGHT

0.396

PACKAGING WEIGHT UNIT

KGM