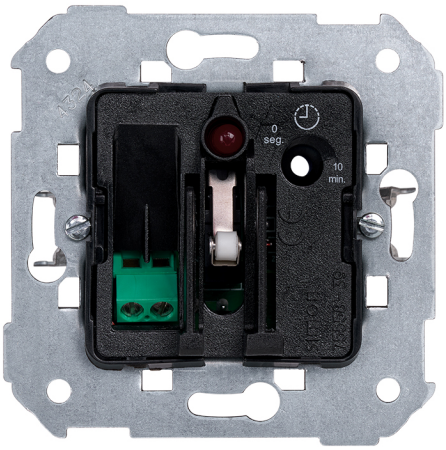
# Switch for card 5 A 250V~ with light indicator and adjustable timing between 0 seconds and 10 minutes Simon 75

REF. **75558-39**



## BASIC INFORMATION

### DESCRIPTION

Switch for card 5 A 250 V~ Simon 75 with light indicator and adjustable timing between 0 seconds and 10 minutes, designed to optimize energy control in hotels, apartments, and professional spaces. An efficient solution that combines functionality and design in a single mechanism. The adjustable timing allows adapting the disconnection time to each project, promoting energy savings and improving the management of lighting and other associated circuits. The integrated light indicator facilitates location and provides an intuitive user experience. Compatible with multiple Simon series, it visually integrates into any environment, maintaining a clean, safe installation that meets current technical requirements.

### MATERIAL

Plastic,Metal

### COMPATIBILITY

Marcos Simon 27 Play, Simon 27 Scudo, Simon 27, Simon 44 Aqua, Simon 75, Simon 82 Detail, Simon 82 Nature and Simon 82.

### PACKAGING CONTENTS

Mechanism and instructions

### ETIM CLASS

EC001590

### REMARKS

It is recommended to protect the faston connectors with heat shrink tubing and connect with a power relay.

## TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,0 to 1,5 mm

CONSUMPTION INDICATOR (MA)
1 mA

NUMBER OF CONTACTS
5

DISCONNECTION TIMER
0 seconds to 10 minutes

COMPATIBLE WITH ELECTRONIC AUXILIARY
No

NUMBER OF POSSIBLE ELEMENTS
1 element

COMPATIBLE WITH FLUORESCENT LAMPS WITH 1-10V DIMMABLE ELECTRONIC BALLAST
No

FREQUENCY
50 Hz

INDICATOR FUNCTION
Yes

CURRENT (A)
5 A

IP RATING
IP20

LINKABLE
No

TYPE OF MECHANISM
Card

MONOBLOCK
No

NOMINAL VOLTAGE (V~)
230 V~

OPERATING TEMPERATURE RANGE (°C)
5 - 40 °C

RECESS DIMENSION (MM)
40

STORAGE TEMPERATURE RANGE (°C)
-25 - 50 °C

VOLTAGE (V~)
230 V~

NUMBER OF WIRES
5

## INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
10

CLAW
Included

REMOVAL OF COVER
Only with tool

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Screw

## REGULATIONS

### REGULATIONS

Dir. 2014/35/UE LVD|Dir. 2011/65/UE RoHS + post. mod.|EN IEC 61058-1:2018 |EN 61058-1-1:2016|EN IEC 63000:2018

## LOGISTICS INFORMATION

### UNITARY EAN CODE
8421053058381

### UNITARY PACKAGING HEIGHT
0

### UNITARY PACKAGING WIDTH
0

### UNITARY PACKAGING LENGTH
0

### UNITARY PACKAGING VOLUME
329232

### UNITARY PACKAGING VOLUME UNIT
MMQ

### UNITARY PACKAGING GROSS WEIGHT
0.09

### PRODUCT NET WEIGHT
0.09

### UNITARY PACKAGING WEIGHT UNIT
KGM

### PACKAGING EAN
8421053058381

### UNITS CONTAINED PACKAGING
1

### PACKAGING HEIGHT
57

### PACKAGING WIDTH
76

### PACKAGING LENGTH
76

### PACKAGING MEASUREMENT UNIT
MMT

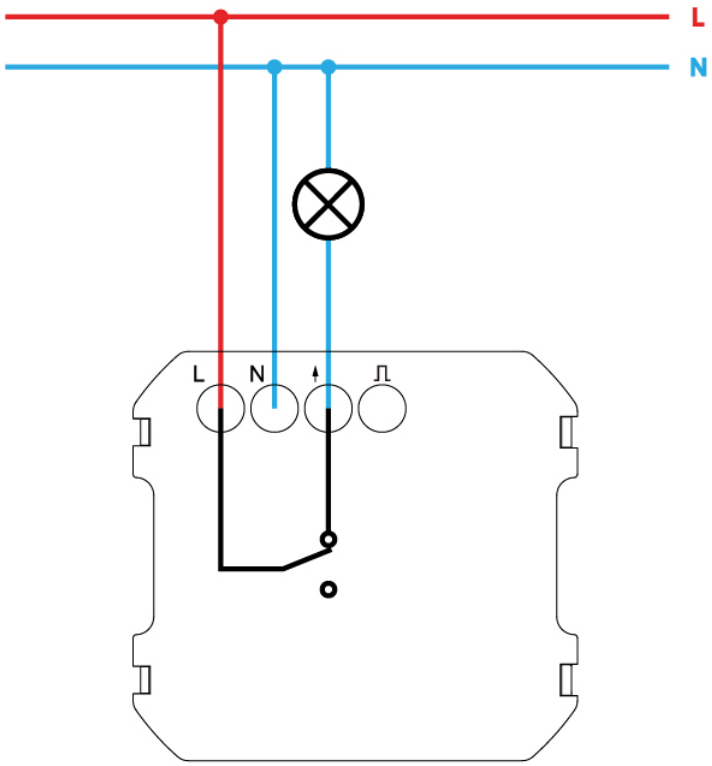
### PACKAGING VOLUME
329232

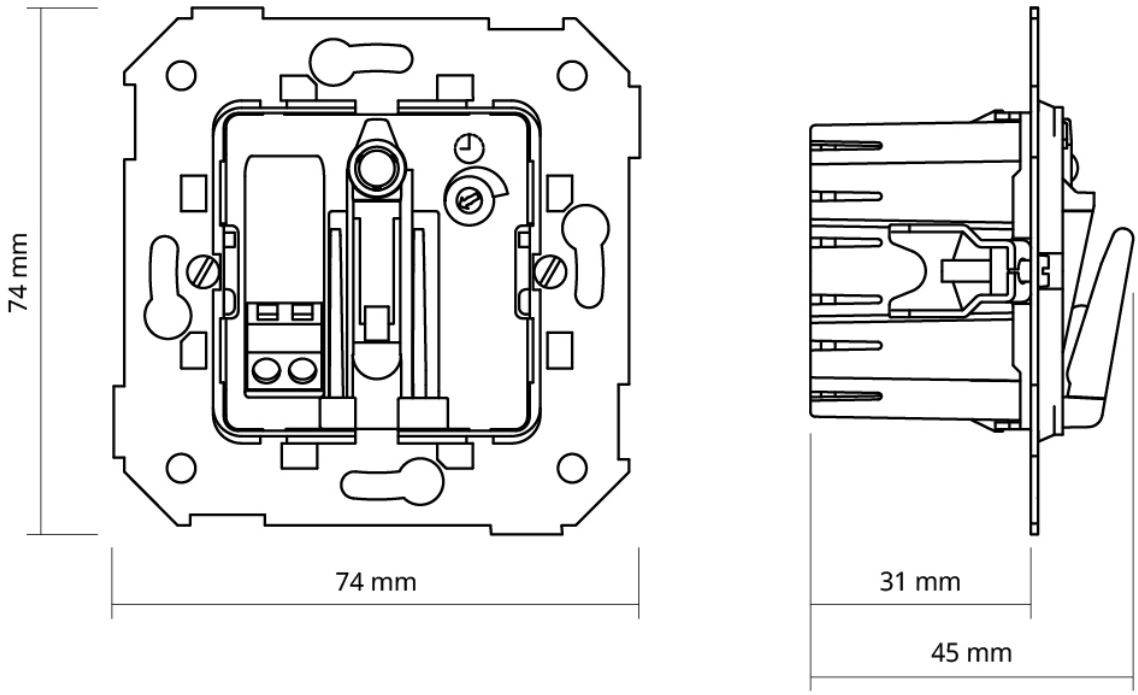
### PACKAGING VOLUME UNIT
MMQ

### PACKAGING GROSS WEIGHT
0

### PACKAGING NET WEIGHT
0.09

### PACKAGING WEIGHT UNIT
KGM


L
N
L
N


74 mm
74 mm
31 mm
45 mm