


## ARCH Downlight X-Less Accessory Round 2 Network 1-10 V

REF. 91591029-999

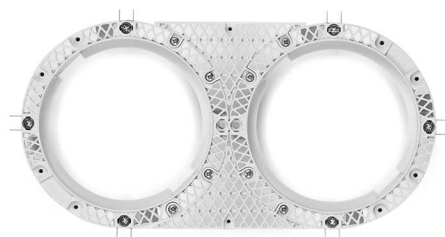

### BASIC INFORMATION

#### APPLICATION

Domestic, Office, Retail, Hotel, Contract Unit

#### PACKAGING CONTENTS

Unit

#### PACKAGING DIMENSIONS (MM)

90x115x290 mm

## TECHNICAL INFORMATION

### FREQUENCY

50 - 60 Hz

### CONTROL

1-10 V, Push Dim

### ENERGY EFFICIENCY

A+

### IP RATING

IP20 / IP43

### COS $\Phi$

0.89

### LIGHTING EFFICIENCY (LM/W)

111 lm/W

### OPERATING TEMPERATURE RANGE (°C)

0 - 35 °C

### DIRECTIONAL

No

### PHOTOBIOLOGICAL CLASSIFICATION

Class II

### POWER SUPPLY (V~)

110/240 V~

### DRIVER INCLUDED

No

### POWER FACTOR ( $\Phi$ )

> 0,9

### ELECTRICAL CLASS

II

## INSTALLATION AND MAINTENANCE

### INSTALLATION ALTERNATIVES

Flush-mounted, Surface-mounted

### INSTALLATION TYPE

Trimless

## REGULATIONS

### EAC MARKED

Yes

### ECORRAE MARKED

Yes

### WARRANTY

5 years

## LOGISTICS INFORMATION

### UNITARY EAN CODE

8436547036691

### UNITARY PACKAGING HEIGHT

0

### UNITARY PACKAGING WIDTH

0

### UNITARY PACKAGING LENGTH

0

### UNITARY PACKAGING VOLUME

0

### UNITARY PACKAGING GROSS WEIGHT

0.576

### PRODUCT NET WEIGHT

0.576

### UNITARY PACKAGING WEIGHT UNIT

KGM

### PACKAGING EAN

8436547036691

### UNITS CONTAINED PACKAGING

1

### PACKAGING HEIGHT

100

### PACKAGING WIDTH

160

### PACKAGING LENGTH

279

### PACKAGING MEASUREMENT UNIT

MMT

### PACKAGING VOLUME

4.464

### PACKAGING VOLUME UNIT

DMQ

### PACKAGING GROSS WEIGHT

0.576

### PACKAGING NET WEIGHT

0.576

### PACKAGING WEIGHT UNIT

KGM