


Touch auxiliary with built-in blue light for items 75305-69 and 75322-69

REF. 75306-69

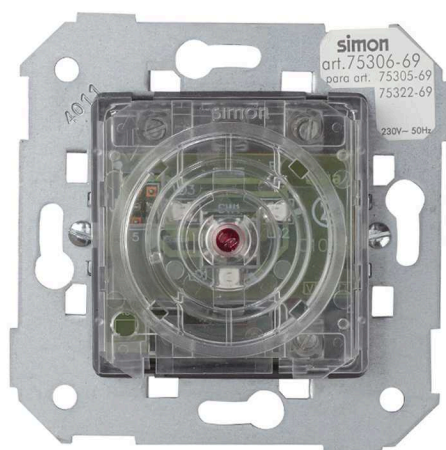

BASIC INFORMATION

DESCRIPTION

Touch assistant with incorporated blue light for the references 75305-69 and 75322-69 belonging to the series Simon 75. The element requires a power of 230V~. Its typology is regulator / 2-way switch. It includes a screw terminal connection and its operation is by pulsation. Allows the use of up to 15 auxiliary elements in the same circuit. The installation is made easier thanks to the compatibility with the mechanisms of the Simon 77 series that incorporates the one click function, a fast and safe system since you will not have to use any extra tools or peel some wire. In this way, just by inserting and pressing it will allow the element to work at 100%. The elements are manufactured by means of electronic components with halogen-free thermoplastic insulation that, in addition to the infinite personalization options, you will have a wide selection of products for every corner of your home.

COMPATIBILITY

Simon 31, Simon 75, Simon 82
Detail, Simon 82 Nature, Simon
82 and Simon 88 frames

COMPATIBLE WITH MECHANICAL 2-WAY/CROSSOVER SWITCH

No

COMPATIBLE WITH MECHANICAL PUSH BUTTON

No

COMPATIBLE WITH MECHANICAL SWITCH

No

PACKAGING CONTENTS

Auxiliary and instruction sheet

ETIM CLASS

EC000011

REMARKS

Allows the use of up to 15 auxiliary elements in the same circuit.

TECHNICAL INFORMATION

AVAILABLE MARKET CE	NUMBER OF POSSIBLE ELEMENTS 1 element	MAXIMUM QUANTITY PER CIRCUIT 15
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	COMPATIBLE WITH FLUORESCENT LAMPS WITH 1- 10V DIMMABLE ELECTRONIC BALLAST	TYPE OF MECHANISM Push
CONSUMPTION INDICATOR (mA) 1.5 mA	No	MINIMUM POWER (W) 40
NUMBER OF CONTACTS 3	COMPATIBLE WITH FLUORESCENT LAMPS (VA)	COMPATIBLE WITH MOTORS (VA) No
NUMBER OF CONTROLLABLE CIRCUITS 1	No	OPERATING TEMPERATURE RANGE (°C) 0 - 55 °C
DISCONNECTION TIMER 15 minutes	FREQUENCY 50 Hz	POWER SUPPLY (V~) 230 V~
COMPATIBLE WITH ELECTRONIC AUXILIARY	INDICATOR FUNCTION Yes	STORAGE TEMPERATURE RANGE (°C) 25 - 70 °C
No	IP RATING IP20	VERSION Single
COMPATIBLE WITH HALOGENS WITH ELECTRONIC TRANSFORMER (W) 500 VA	COMPATIBLE WITH LOW CONSUMPTION (W) No	NUMBER OF WIRES 3
	MAXIMUM POWER (W) 500	

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 6	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	INSTALLATION TYPE Suitable for surface and flush mounting
CLAW Included		

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2014/30/UE EMC | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-2-1:2004 | EN 60669-2-1:2004 A1:2009 | EN 60669-2-1:2004 A12:2010 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053068328

UNITARY PACKAGING WEIGHT

UNIT

KGM

PACKAGING MEASUREMENT

UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053068328

PACKAGING VOLUME

329232

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

57

PACKAGING GROSS WEIGHT

0.09

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

76

PACKAGING NET WEIGHT

0.089

UNITARY PACKAGING GROSS WEIGHT

0.089

PACKAGING LENGTH

76

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.089