
Double USB charger 5V DC 2.1A type A female

REF. **7511096-039**

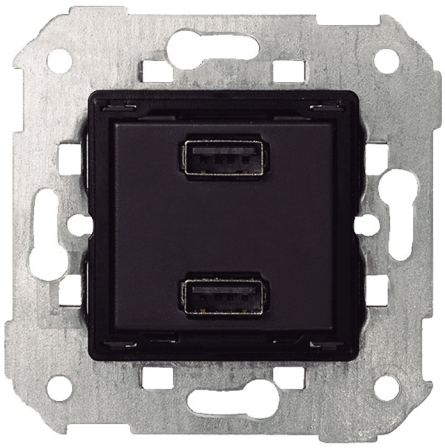

BASIC INFORMATION

COMPATIBILITY

Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 and Simon 88 frames

PACKAGING CONTENTS

Charger and instruction sheet

ETIM CLASS

EC002949

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
1,5 mm

NUMBER OF POSSIBLE ELEMENTS
1 element

FORMAT
2 USB A

INDICATOR FUNCTION
No

CURRENT (A)

IP RATING
IP20

TYPE OF MECHANISM
Insertion

NOMINAL VOLTAGE (V~)
230 V~

OPERATING TEMPERATURE RANGE (°C)
5 - 40 °C

POWER SUPPLY (V~)
230 V~

STORAGE TEMPERATURE RANGE (°C)
-20 - 75 °C

USB CURRENT (A)
2,1 A

VERSION
Single

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
7

CLAW
Optional

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Screw

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053203477

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.09

PRODUCT NET WEIGHT
0.09

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053203477

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
57

PACKAGING WIDTH
76

PACKAGING LENGTH
76

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
329232

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.098

PACKAGING NET WEIGHT
0.09

PACKAGING WEIGHT UNIT
KGM