
Trim plate for 1 XLR connector male or female for 1 element aluminium Simon K45

REF. **K122/8**

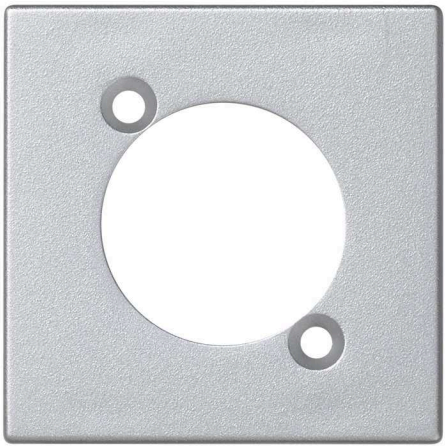

BASIC INFORMATION

DESCRIPTION

Simon constantly performs modularity and flexibility studies. Its installation is expandable and configurable according to every connection need in electrical, voice, data and multimedia. This is often required in a minimum work space, the use of few or any tools for its installation and a maximum functionality. This is added to the creativity in design and total Integration in the environment. It is a trim plate for 1 male or female XLR connector, 1 element. Aluminium finish, Simon K45 range. The connector is not included (to be purchased separately). The plate includes 5-mm diameter housings for fastening the connector to the plate with screws. Plate Individual. Suitable for surface mounting and flush mounting. Resistant to corrosion and extreme temperatures (-5 to 60 °C). Halogen-free thermoplastic that guarantees no flame propagation in case of fire and low toxicity in case of smoke dimensions 45 x 45 x 8.5 mm Clean with dry cloths without chlorine added. Easy maintenance.

FINISH

Aluminium

MATERIAL

Plastic

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-033)

PACKAGING CONTENTS

Plate for 1 XLR connector

ETIM CLASS

EC000018

REMARKS

Connector not included (to be purchased separately). The plate includes 5-mm diameter housings for fixing the connector to the plate with screws.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60° C

FORMAT

XLR

INDICATOR FUNCTION

No

IP RATING

IP20

KIT AVAILABILITY

No

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60° C

NUMBER OF MODULES

Half

VERSION

Single

INSTALLATION AND MAINTENANCE

TYPE OF FASTENING

Fixing by direct snap-fit, no tools needed

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

REMOVAL OF THE PLATE

Only with tool

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-033)

INSTALLATION TYPE

Suitable for surface and flush mounting

REGULATIONS

REGULATIONS

Dir. 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0.3

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.01

PRODUCT NET WEIGHT
0.01

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8426436045125

UNITS CONTAINED PACKAGING
20

PACKAGING HEIGHT
70

PACKAGING WIDTH
93

PACKAGING LENGTH
140

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
911400

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.2

PACKAGING NET WEIGHT
0.2

PACKAGING WEIGHT UNIT
KGM