


## Schuko socket base with double USB A + C charger 10.5W Simon 75

REF. 7531432-039

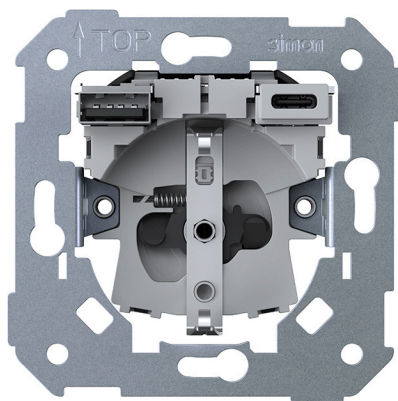

## BASIC INFORMATION

### DESCRIPTION

The schuko socket base with double USB A + C charger 10.5W Simon 75 is the perfect solution for those seeking a power outlet with integrated USB that combines functionality, design, and maximum safety. This mechanism allows for connecting conventional electrical devices via schuko plug 16 A 250 V~, while also offering direct charging for mobile devices, smartphones, tablets, and other electronic devices thanks to its USB type A and USB type C ports. With a total power of 10.5W and an output of 5Vdc up to 2.1 A, this schuko base with double USB facilitates efficient charging of Android and iOS devices without the need for additional adapters. It is ideal for homes, offices, hotels, and commercial spaces that require modern and discreet charging solutions. Its screw terminal connection system ensures safe and professional installation, accommodating cable cross-sections from 1.5 to 2.5 mm<sup>2</sup>. Designed for flush or surface installation in a universal box. With an IP20 protection rating and compliance with LVD, EMC, and RoHS regulations, it offers reliability, durability, and safety for daily use. The schuko socket with USB A+C Simon 75 is the ideal option for modernizing electrical installations, optimizing spaces, and providing a socket base with an integrated USB charger that meets current connectivity and charging needs.

### MATERIAL

Plastic,Metal

### COMPATIBILITY

Simon 82 Detail, Simon 82 Nature, Simon 82 Concept, and Simon 82

### ETIM CLASS

EC000125

### REMARKS

The mechanism includes the child protection function.

## TECHNICAL INFORMATION

### NUMBER OF CONNECTORS

3

### LINKABLE

Yes

### USB CURRENT (A)

2,1 A

### CONNECTOR TYPE

Schuko,USB A,USB C

### MAXIMUM POWER (W)

4000

### USB PORT TYPE

A,C

### NUMBER OF CONTACTS

3

### MONOBLOCK

Yes

### POWER DELIVERY USB

No

### FORMAT

Schuko,USB A,USB C

### NOMINAL VOLTAGE (V~)

230 V~

### QUICK CHARGE USB

No

### FREQUENCY

50 - 60 Hz

### PLATE TYPE

Flat

### USB VOLTAGE (V~)

5 Vdc

### INDICATOR FUNCTION

No

### POWER SUPPLY (V~)

250 V~

### VOLTAGE (V~)

230 V~

### CURRENT (A)

16 A

### RECESS DIMENSION (MM)

45

### NUMBER OF WIRES

3

### IP RATING

IP20

### USB CHARACTERISTICS

USB A+C= 5,0 VDC 2,1 A 10,5W ;  
USB A= 5,0 VDC 2,1 A 10,5W ;  
USB C= 5,0 VDC 2,1 A 10,5W

## INSTALLATION AND MAINTENANCE

### CABLE STRIPPING NECESSARY (MM)

10

### REMOVAL OF COVER

Only with tool

### TYPE OF TERMINAL

#### CONNECTION - FUNCTION 2

Schuko/USB: Screw

### CLAW

Simon 75

### TYPE OF TERMINAL

#### CONNECTION - FUNCTION 1

Screw

## LOGISTICS INFORMATION

### UNITARY EAN CODE

8421053438817

### UNITARY PACKAGING HEIGHT

0

### UNITARY PACKAGING WIDTH

0

### UNITARY PACKAGING LENGTH

0

### UNITARY PACKAGING MEASUREMENT UNIT

MMT

### UNITARY PACKAGING VOLUME

0

### UNITARY PACKAGING VOLUME UNIT

MMQ

### UNITARY PACKAGING GROSS WEIGHT

0.08

### PRODUCT NET WEIGHT

0.08

### UNITARY PACKAGING WEIGHT UNIT

KGM

### PACKAGING EAN

8421053438817

### UNITS CONTAINED PACKAGING

1

### PACKAGING HEIGHT

57

### PACKAGING WIDTH

76

### PACKAGING LENGTH

76

### PACKAGING MEASUREMENT UNIT

MMT

### PACKAGING VOLUME

329232

### PACKAGING VOLUME UNIT

MMQ

### PACKAGING GROSS WEIGHT

0.1

### PACKAGING NET WEIGHT

0.08

### PACKAGING WEIGHT UNIT

KGM

