


MOOD 25 wall-mounted luminaire X-Less 4000 K

REF. 91620104-499

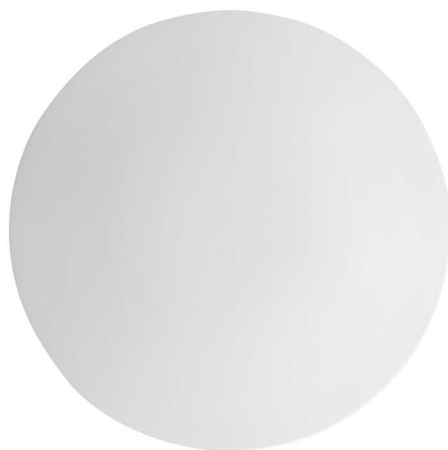

BASIC INFORMATION

FINISH

White

PACKAGING CONTENTS

1 Unit

APPLICATION

Domestic, Office, Retail, Hotel, Contract

ETIM CLASS

EC002892

REMARKS

The electric installation needs to have been done before fitting the Trimless accessory to the wall.

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

IP RATING

IP20

OPERATING TEMPERATURE RANGE (°C)

0 - 35 °C

POWER SUPPLY (V~)

24 V~

COLOR TEMPERATURE (K)

4000 K

CRI

80

DIRECTIONAL

No

DRIVER INCLUDED

No

ELECTRICAL CLASS

III

ENERGY EFFICIENCY

A+

L70 (°C)

100000h at 25°C

LIGHT BEAM APERTURE ANGLE (°)

112°

COLOR TYPE

CW

LIGHTING EFFICIENCY (LM/W)

hasta 60 lm/W

LUMENS (LM)

26 lm

NUMBER OF LUMINAIRES

1

MACADAM STEPS

<3 Step MacAdam

OPTICS

General 112°


POWER (W)

0.7 W

CHROMATICS CRI ICONS

CRI
80

PHOTOMETRY ASSETS – POLAR

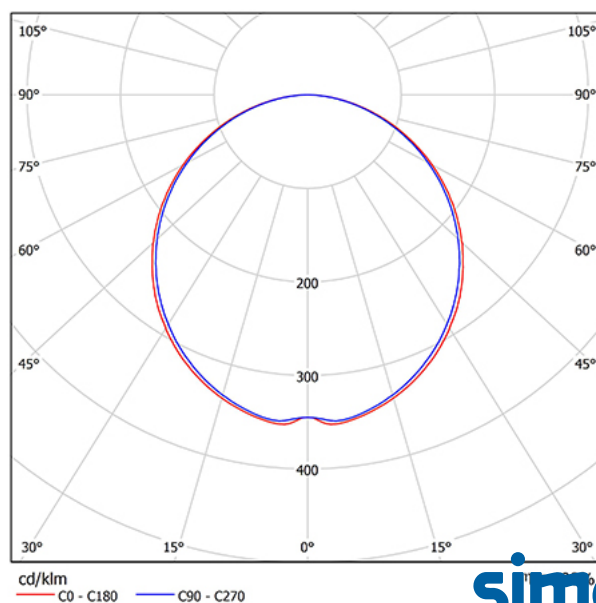

INSTALLATION AND MAINTENANCE

INSTALLATION TYPE

Trimless

REGULATIONS

EAC MARKED

No

ECORRAE MARKED

Yes

WARRANTY

5 years

LOGISTICS INFORMATION

UNITARY EAN CODE

8436547047086

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8436547047086

PACKAGING VOLUME

348600

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

60

PACKAGING GROSS WEIGHT

0.058

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

70

PACKAGING NET WEIGHT

0.045

UNITARY PACKAGING GROSS
WEIGHT

0.058

PACKAGING LENGTH

83

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.045