

Modular luminaire 726 120x30 Low Glare NW

REF. 72661033-684



BASIC INFORMATION

DESCRIPTION

In the series Simon 726 modular luminaires, it is possible to access a large catalogue of products, specific for indoor lighting of the highest quality. This is the luminaire 726 modular 120 x 30 LowGlare, with lights leds tone (NW) .su neutral colour temperature of 4000 K and has 3200 lumens with a power of 39 W The luminaire optics of this Simon category B is microprismatic. It is presented in a finished in aluminium colour, which gives it an appearance, ideal to be properly in any decoration. Its power supply is 220-240 V and its frequency is 50 / 60 Hz. The luminaire Simon measures 1195-295 millimetres and its weight is 2,6 kilos. The installation you in false ceiling, with the hardware. The electric control of this product is committed to the simple system of ON-OFF.

DIFFUSER MATERIAL

PMMA

PACKAGING CONTENTS

1 unit

APPLICATION

General lighting

ETIM CLASS

EC002892

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

DRIVER INCLUDED

Yes

LUMENS (LM)

3200 lm

IP RATING

IP20

ELECTRICAL CLASS

Type 2

LUMENS/W

3200 lm/39W

OPERATING TEMPERATURE RANGE (°C)

-15 - 40 °C

INTEGRATED POWER SUPPLY

No

OPTICS

Microprismatic

POWER SUPPLY (V~)

220/240 V~

L70 (°C)

30,000 h at 25 °C

PHOTOBIOLOGICAL CLASSIFICATION

Exempt category

COLOR TEMPERATURE (K)

4000 K

LIGHT BEAM APERTURE ANGLE (°)

90°

POWER (W)

39 W

CONTROL

On/Off

COLOR TYPE

NW

SERVICE LIFE

30.000 h

CRI

80

LIGHTING EFFICIENCY (LM/W)

82 lm/W

CHROMATICS CRI ICONS

CRI
80

PHOTOMETRY ASSETS – CONICAL

0.5	0.96 0.96	E(0°)	6107
		E(C90)	1153
		E(C0)	1146
1.0	1.92 1.92	E(0°)	1527
		E(C90)	288
		E(C0)	286
1.5	2.88 2.89	E(0°)	679
		E(C90)	128
		E(C0)	127
2.0	3.84 3.85	E(0°)	382
		E(C90)	72
		E(C0)	72
2.5	4.79 4.81	E(0°)	244
		E(C90)	46
		E(C0)	46
3.0	5.75 5.77	E(0°)	170
		E(C90)	32
		E(C0)	32

Separación [m]


Diámetro cónico [m]

Intensidad luminica [lx]

C0 - C180 (Semiángulo de dispersión: 87.8°)

C90 - C270 (Semiángulo de dispersión: 87.6°)

PHOTOMETRY ASSETS – POLAR

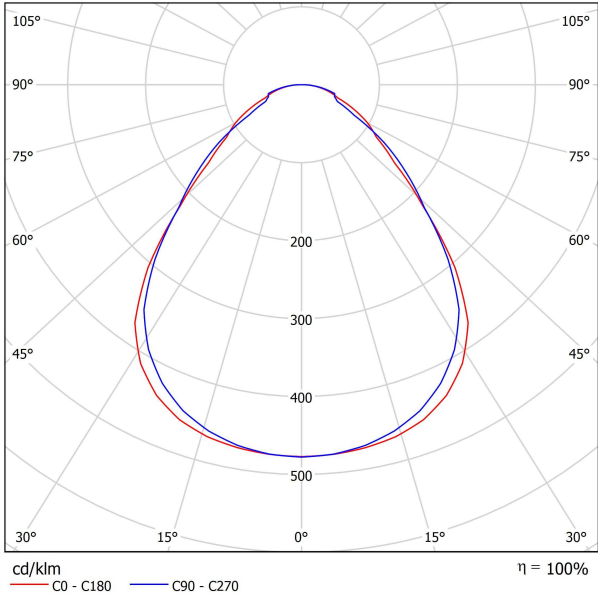

INSTALLATION AND MAINTENANCE

INSTALLATION ALTERNATIVES

Plaster ceiling, surface mount, flush mount, concealed profile and suspended

MINIMUM INSTALLATION HEIGHT

250

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

INSTALLATION TYPE

False ceiling, visible hardware

REGULATIONS

WARRANTY

3 years 30,000 h

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

1281

UNITARY PACKAGING WIDTH

40

UNITARY PACKAGING LENGTH

350

UNITARY PACKAGING
MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

17.934

UNITARY PACKAGING VOLUME
UNIT

DMQ

UNITARY PACKAGING GROSS
WEIGHT

3

PRODUCT NET WEIGHT

2.1

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING EAN

8421053194034

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

1281

PACKAGING WIDTH

40

PACKAGING LENGTH

350

PACKAGING MEASUREMENT
UNIT

MMT

PACKAGING VOLUME

17934000

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

3

PACKAGING NET WEIGHT

2.1

PACKAGING WEIGHT UNIT

KGM