


Voice and data flat plate without dust cover for 1 element for 2 Panduit® RJ45 connectors black Simon K45

REF. KB069/14

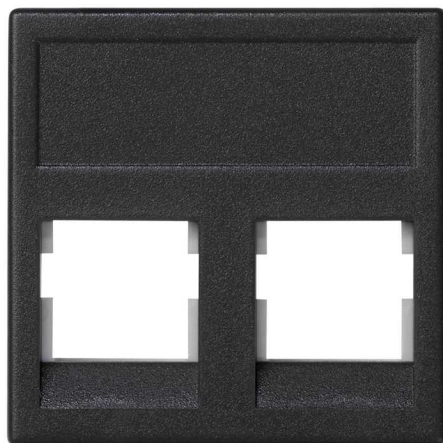

BASIC INFORMATION

DESCRIPTION

Innovation and functionality in its work area with the plate of voice and data plate without dust cover with 1 element and 2 RJ45 Panduit, within the collection Simon K45. With the delicacy of avant-garde finishes in black, the plate of voice and data K45 gives a jump of quality thanks to the connection with Panduit and its RJ45 connector to ensure the excellence in their connections. With installation of direct snap-fit, you can prepare both in surface-mounted and recessed, without the need to use screws, minimising the time of installation and maximizing its functionality. Also, within the range K45, you can combine the flat base plate with the 90 ° positioner (ref.K66) to guide the plate and adapt it to vertical enclosures type columns, Teleblock, channels mechanism-holders. Manufactured with metal materials isolated with halogen-free thermoplastic, prevent the propagation of the flame and the toxicity smoke in case of fire. Security, innovation and functionality in the Simon K45 range.

FINISH

Black

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-038)

PACKAGING CONTENTS

Flat voice and data plate without dust cover

ETIM CLASS

EC000018

REMARKS

When combining the voice and data plate in vertical housings (mini columns, columns, Teleblock, channels, mechanism holders, etc.) you must use the 90° positioner (ref. K66) to guide the plate into a vertical position.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

DUST SHUTTER

No

NUMBER OF MODULES

Half

AVAILABLE IN

Plate for 1 and 2 RJ45 connectors

FORMAT

RJ45

PLATE TYPE

Flat

COMPATIBLE WITH CONNECTORS

Panduit® Mini-Com Series.

IP RATING

IP20

RAL

7021

RJ45 CONNECTORS

Not included in voice and data plate

KIT AVAILABILITY

No

RJ45 ADAPTOR MODULE

Included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60° C

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

SNAP-FIT RJ45 PLATES

Panduit® RJ45 connectors

SNAP-FIT TYPE

Panduit® RJ45 connectors

DUST PROTECTION

No

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60° C

VERSION

Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-038)

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

INSTALLATION TYPE

Suitable for surface and flush mounting

REMOVAL OF THE PLATE

Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.012

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING VOLUME

911400

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8426436037298

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

45570

UNITS CONTAINED PACKAGING

20

PACKAGING GROSS WEIGHT

0.24

UNITARY PACKAGING VOLUME UNIT

MMQ

PACKAGING HEIGHT

70

PACKAGING NET WEIGHT

0.24

UNITARY PACKAGING GROSS WEIGHT

0.012

PACKAGING WIDTH

93

PACKAGING WEIGHT UNIT

KGM

PACKAGING LENGTH

140