

2-way switch 10AX 250V~ with built-in light and fast terminal connection system champagne Simon 31

REF. 31204-34



BASIC INFORMATION

DESCRIPTION

In the Simon 31 series, with its classic lines and elegant, we find the 2-way switch with champagne finish and for luminous signalling. In an individual version with a single element and two modules. Its reference is 32104-34. With a current of 10A and a voltage of 250V~ Its terminal system is fast and its rocker function. It measures 64x65mm. Can be combined with the reference 31803-31 in case of replacing the indicator light. Made of metal components with a halogen-free coated halogen-free and with a built-in trim in metallised thermoplastic. Supports a cable section between 1.5 and 2.5mm and a stripped wire of 11mm.

FINISH

Champagne

COMPATIBILITY

Simon 31 frames

PACKAGING CONTENTS

Mechanism with rocker

REMARKS

Can be combined with article 31803-31 if replacing the light indicator.

TECHNICAL INFORMATION

AVAILABLE MARKET CE	CURRENT (A) 10 AX	NOMINAL VOLTAGE (V~) 250 V~
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	IP RATING IP20	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C
CONSUMPTION INDICATOR (MA) 1 mA	MAINTENANCE Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
NUMBER OF POSSIBLE ELEMENTS 1 element	TYPE OF MECHANISM Pivoting	VERSION Single
INDICATOR FUNCTION Yes		

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 11	INSTALLATION TYPE Suitable for surface and flush mounting
INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast

REGULATIONS

REGULATIONS

UNE-EN 60669-1:2002 + A1:2003 + A2:2009

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
3026595

UNITARY PACKAGING VOLUME
UNIT
MMQ

UNITARY PACKAGING GROSS
WEIGHT
0.093

PRODUCT NET WEIGHT
0.093

UNITARY PACKAGING WEIGHT
UNIT
KGM

PACKAGING EAN
8421053008690

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
83

PACKAGING WIDTH
165

PACKAGING LENGTH
221

PACKAGING MEASUREMENT
UNIT
MMT

PACKAGING VOLUME
3026595

PACKAGING VOLUME UNIT
MMQ


PACKAGING GROSS WEIGHT
0.925

PACKAGING NET WEIGHT
0.93


PACKAGING WEIGHT UNIT
KGM

MECANISMOS SIMON 31, 75, 77, 82 Y 88


Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch
XXXX101-XXX

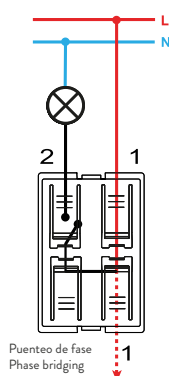


Interrupor unipolar / Single-pole switch
7700101-039




Pulsador / Push button switch
XXXX150-XXX

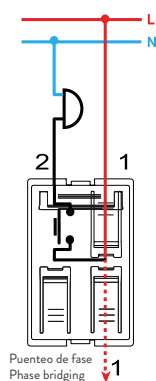


Pulsador / Push button switch
7700150-039




Interrupor bipolar / Double pole switch
XXXX133-XXX

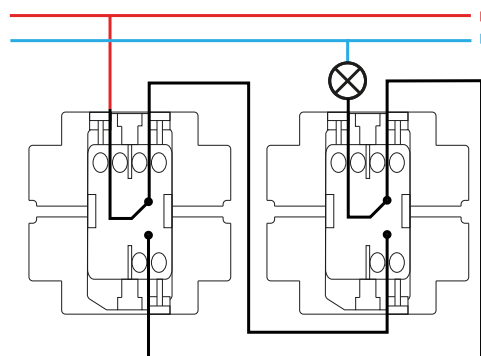


Conmutador / 2-way switch
XXXX201-XXX

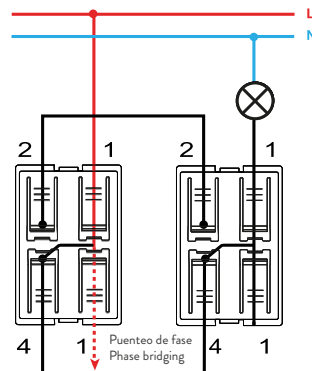


Conmutador / 2-way switch
7700201-039

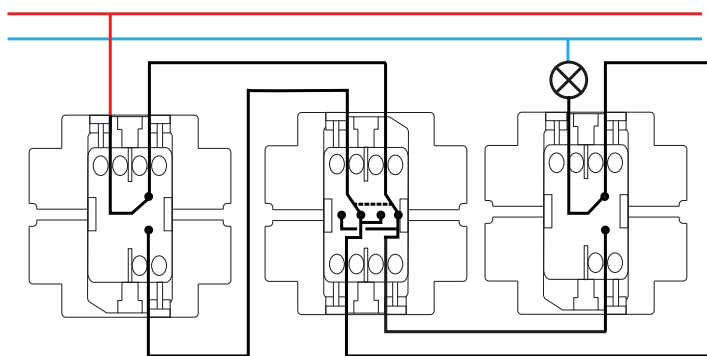


Conmutador cruce / Intermediate switch
XXXX251-XXX

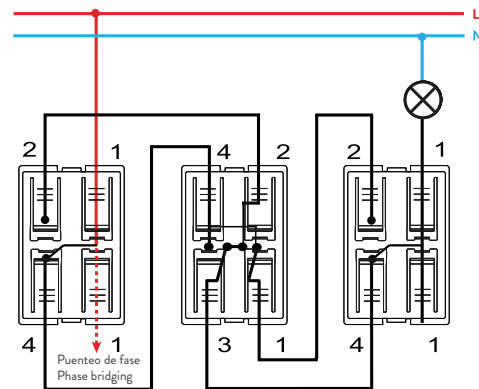


Conmutador cruce / Intermediate switch
7700251-039

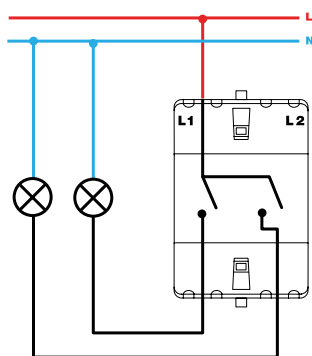


Grupo 2 interruptores / 2 switches group
XXXX398-XXX

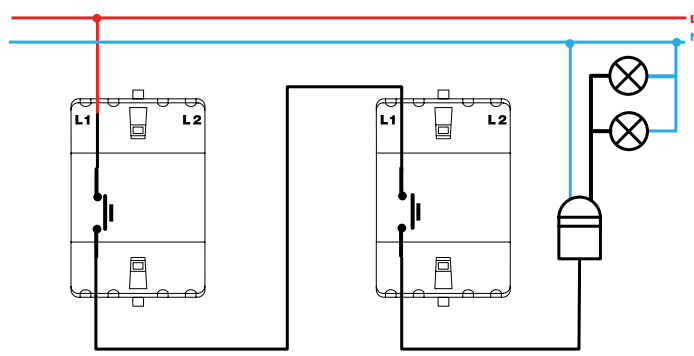


Pulsador desconexión / Push button disconnection switch
XXXX152-XXX

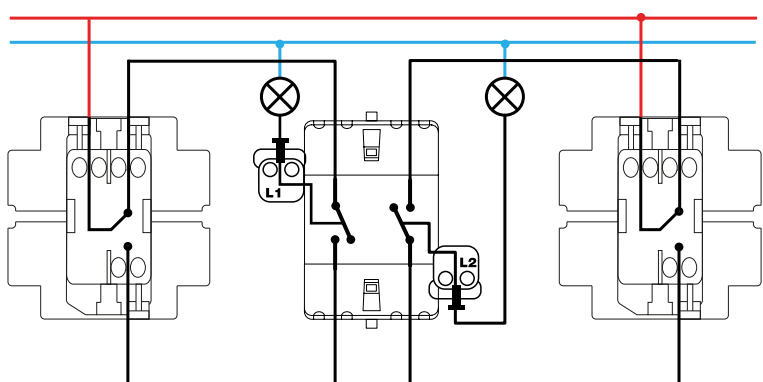


Grupo dos conmutadores / 2-way switches group
XXXX397-XXX

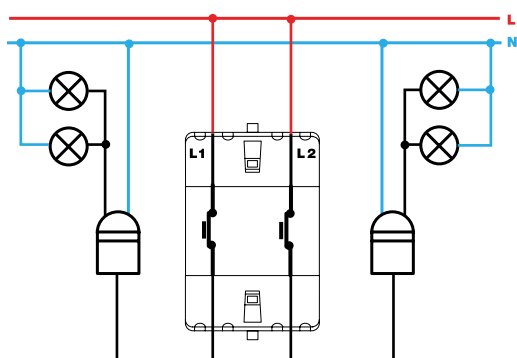


Grupo de pulsadores desconexión / Push button switch
desconexion group XXXX395-XXX

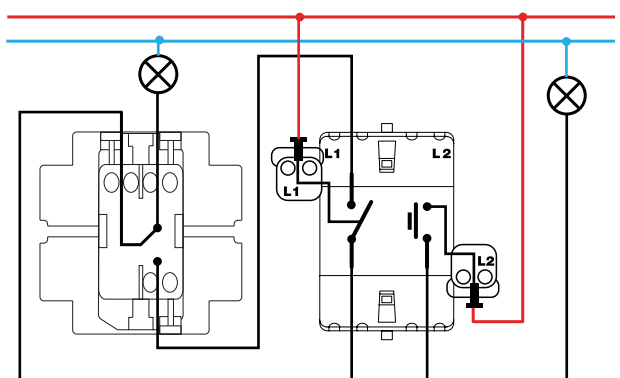


Grupo conmutador y pulsador / 2-way and push button switch group
XXXX301-XXX




Interrupor unipolar / Single-pole switch
XXXX102-XXX

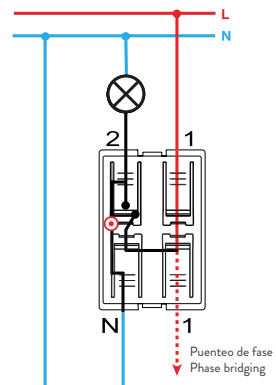


Interrupor con piloto / Push button pilot switch
7700112-039

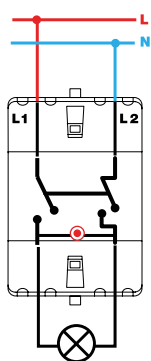


Interrupor bipolar / Double pole switch
XXXX134-XXX

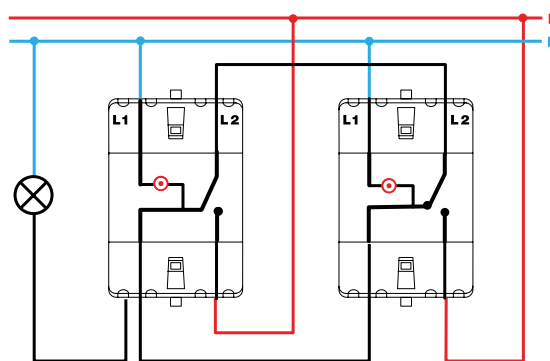


Conmutador / 2-way switch
XXXX202-XXX




Interruptor unipolar con luminoso / Single-pole switch with light
XXXX104-XXX




Pulsador con luminoso / Push button switch with light
XXXX160-XXX

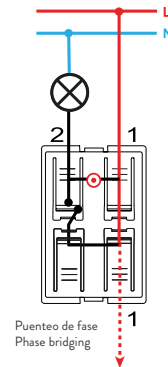

Pulsador con luminoso / Push button switch with light
7700160-039

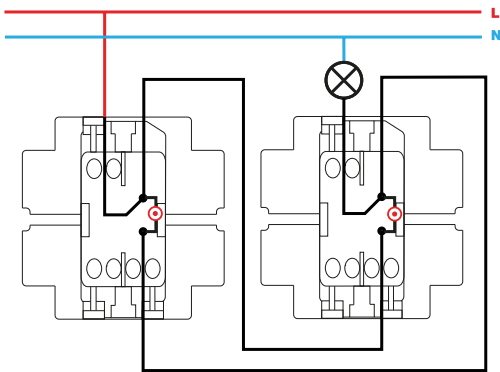

Conmutador con luminoso / 2-way switch with light
XXXX204-XXX

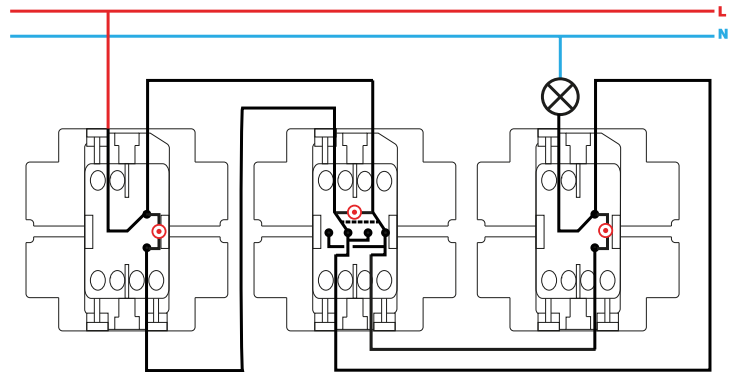

Conmutador cruce con luminoso / Intermediate switch with light
XXXX254-XXX