

Single-pole switch 10AX 250V~ for half element with built-in pilot light and fast terminal connection system ivory
Simon 27 Play

REF. 27102-61



BASIC INFORMATION

DESCRIPTION

One of the most important elements for the operation of an electrical system is the switches. Thanks to these mechanisms, we can turn the light on or off. One of the most demanded is the Switch single-pole of fast-terminals connection in ivory colour of the Simon 27 Play series, with a current of 10 AX and a voltage of 250V~, it is a half element mechanism with tilting operation system. It is a piece with incorporated pilot that has been manufactured with metal components with halogen-free insulation and thermoplastic trim, suitable for surface and flush mounting, this switch can be combined with the reference 2700802-037 in case of replacement of the indicator light, a soft, dry cloth is sufficient to clean the structure and prevent oxidation. The mechanisms of switch of the Simon 27 Play series, it is installed when a lighting point is operated from a single location.

FINISH

Ivory

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rocker

ETIM CLASS

EC001590

REMARKS

Can be combined with article 2700802-037 if replacing the light indicator.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

10 AX

NOMINAL VOLTAGE (V~)

250 V~

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

IP RATING

IP20

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CONSUMPTION INDICATOR (mA)

0.55 mA

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

NUMBER OF POSSIBLE ELEMENTS

Half element

TYPE OF MECHANISM

Pivoting

VERSION

Single

INDICATOR FUNCTION

Yes

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

CLAW

Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, American, Small
spaces and Centralisations

INSTALLATION DIRECTION

Horizontal, Vertical

INSTALLATION TYPE

Suitable for surface and flush
mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053251454

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

1229865

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.025

PRODUCT NET WEIGHT

0.025

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053035900

UNITS CONTAINED PACKAGING

20

PACKAGING HEIGHT

53

PACKAGING WIDTH

105

PACKAGING LENGTH

221

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

1229865

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.51

PACKAGING NET WEIGHT


0.5

PACKAGING WEIGHT UNIT


KGM

MECANISMOS SIMON 27, 28 Y 44


Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch
XX00101-XX




Pulsador / Push button switch
XX00150-XX



Interrupor bipolar / Double pole switch
XX00133-XX




Conmutador / 2-way switch
XX00201-XX

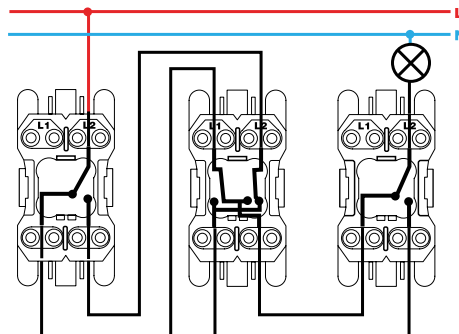


Conmutador cruce / Intermediate switch
XX00251-XX


Mecanismos con piloto / Pilot switches




Interrupor unipolar / Single-pole switch
XX00102-XX




Interrupor bipolar / Double pole switch
XX00134-XX

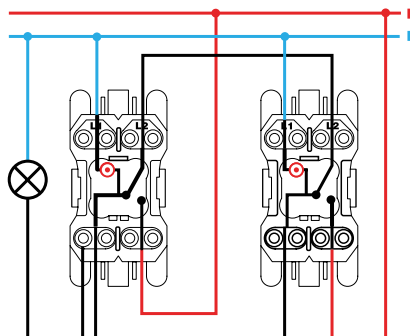


Conmutador / 2-way switch
XX00202-XX




Interrupor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX

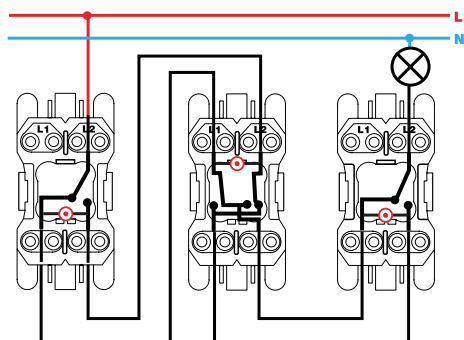

Conmutador cruce / Intermediate switch
XX2700254-XX