

POINT spotlight Rail 3000 K Spot White

REF. 92001001-300



BASIC INFORMATION

BODY MATERIAL

Die-cast aluminium

PACKAGING CONTENTS

1 Unit

ETIM CLASS

EC001744

APPLICATION

Domestic,Office,Retail,Contract

PACKAGING DIMENSIONS (MM)

160x255x234 mm

REMARKS

Includes a laser positioner for focusing

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

DIRECTIONAL

Yes

LUMENS (LM)

1600 lm

IP RATING

IP20

DRIVER INCLUDED

Yes

NUMBER OF LUMINAIRES

1

OPERATING TEMPERATURE RANGE (°C)

0 - 35 °C

ELECTRICAL CLASS

III

MACADAM STEPS

<3 Step MacAdam

POWER SUPPLY (V~)

100/277 V~

ENERGY EFFICIENCY

A+

OPTICS

Spot 15°

RAL

9016

L70 (°C)

100000h at 25°C

PHOTOBIOLOGICAL CLASSIFICATION

Class II

COLOR TEMPERATURE (K)

3000 K

L90 (°C)

40000h at 25°C

POWER FACTOR (Φ)

> 0,98

CONTROL

On Board Dimmer,Laser

COLOR TYPE

NW

POWER (W)

25 W


CRI

90

LIGHTING EFFICIENCY (LM/W)

88 lm/W

PHOTOMETRY ASSETS - POLAR

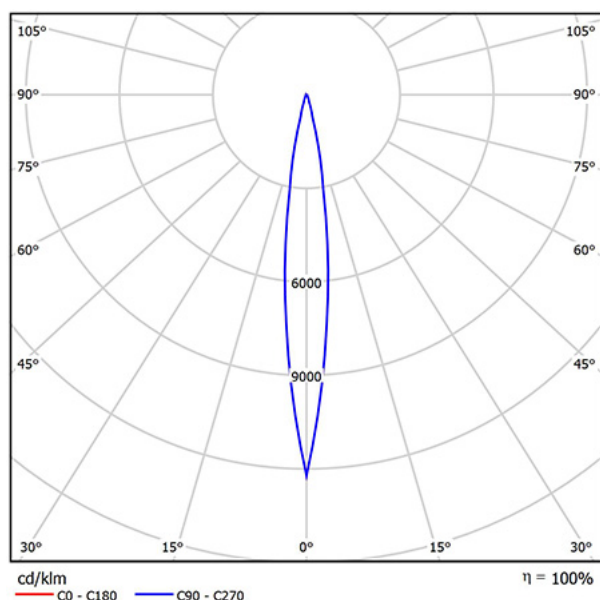

INSTALLATION AND MAINTENANCE

INSTALLATION ALTERNATIVES

Flush-mounted

INSTALLATION TYPE

Rail

REGULATIONS

EAC MARKED

Yes

ECORRAE MARKED

Yes

WARRANTY

5 years

LOGISTICS INFORMATION

UNITARY EAN CODE

8436547034383

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

2.38

PRODUCT NET WEIGHT

1.02

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8436547034383

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

234

PACKAGING WIDTH

255

PACKAGING LENGTH

160

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

10014720

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

1.12

PACKAGING NET WEIGHT

1.02

PACKAGING WEIGHT UNIT

KGM