


# Intermediate switch 10A 250V~ for half element with fast terminal connection system white Simon 27 Play

REF. 27251-64

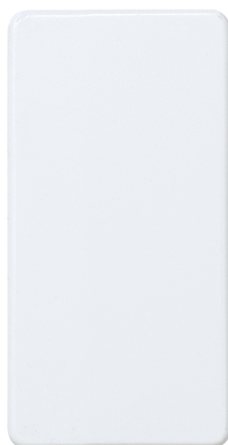

## BASIC INFORMATION

### DESCRIPTION

The crossover switch / 2-way switch de passage of the Simon 27 Play series, you can take several points in the same space in the operate one mechanism with its finished in white, in the individual version close composed of a half element. The reference is 27252-64. Its current is 10A and its voltage of 250V~ It has a quick terminal connection with a rocker operation. It does not include engraving on the plate, the rockers and covers. The wire cross-section passes between 1.5 and the 2.5mm, and the stripping of the wire is 11mm. It measures 22,5x45mm. It is made of metal components with halogen-free thermoplastic insulation and a thermo-stable plastic trim in that resists very well the temperature.

### FINISH

White

### COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

### PACKAGING CONTENTS

Mechanism with rocker

### ETIM CLASS

EC001590

### REMARKS

Possibility of substituting the finish of the rocker supplied with a different one. 5 additional finishes available.

## TECHNICAL INFORMATION

### AVAILABLE MARKET

CE

### CURRENT (A)

10 AX

### OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

### CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

### IP RATING

IP21

### STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

### NUMBER OF POSSIBLE ELEMENTS

Half element

### MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

### VERSION

Single

### INDICATOR FUNCTION

No

### TYPE OF MECHANISM

Pivoting

### VOLTAGE (V~)

250 V~

## INSTALLATION AND MAINTENANCE

### CABLE STRIPPING NECESSARY (MM)

11

### INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, American, Small spaces and Centralisations

### INSTALLATION TYPE

Suitable for surface and flush mounting

### CLAW

Simon 27

### INSTALLATION DIRECTION

Horizontal, Vertical

### TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

## REGULATIONS

### REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

## LOGISTICS INFORMATION

### UNITARY EAN CODE

8421053251928

### UNITARY PACKAGING HEIGHT

22.6

### UNITARY PACKAGING WIDTH

38.1

### UNITARY PACKAGING LENGTH

45.5

### UNITARY PACKAGING MEASUREMENT UNIT

MMT

### UNITARY PACKAGING VOLUME

0.039

### UNITARY PACKAGING VOLUME UNIT

MMQ

### UNITARY PACKAGING GROSS WEIGHT

0.028

### PRODUCT NET WEIGHT

0.028

### UNITARY PACKAGING WEIGHT UNIT

KGM

### PACKAGING EAN

8421053035566

### UNITS CONTAINED PACKAGING

20

### PACKAGING HEIGHT

53

### PACKAGING WIDTH

105

### PACKAGING LENGTH

220

### PACKAGING MEASUREMENT UNIT

MMT

### PACKAGING VOLUME

1.224

### PACKAGING VOLUME UNIT

DMQ

### PACKAGING GROSS WEIGHT

0.6

### PACKAGING NET WEIGHT

0.56

### PACKAGING WEIGHT UNIT

KGM

# MECANISMOS SIMON 27, 28 Y 44

## Mecanismos básicos / Basic switches



Interrupor unipolar / Single-pole switch  
XX00101-XX



Pulsador / Push button switch  
XX00150-XX



Interrupor bipolar / Double pole switch  
XX00133-XX



Conmutador / 2-way switch  
XX00201-XX



Conmutador cruce / Intermediate switch  
XX00251-XX

## Mecanismos con piloto / Pilot switches



Interrupor unipolar / Single-pole switch  
XX00102-XX



Interrupor bipolar / Double pole switch  
XX00134-XX



Conmutador / 2-way switch  
XX00202-XX



Interrupor unipolar / Single-pole switch  
XX00104-XX



Pulsador / Push button switch  
XX00160-XX




Conmutador / 2-way switch  
XX2700204-XX




Conmutador cruce / Intermediate switch  
XX2700254-XX

## VISTA FRONTAL E ISOMÉTRICA DEL PRODUCTO

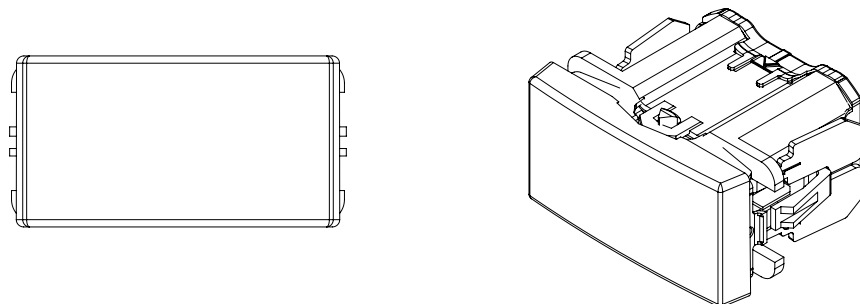

## DIAGRAMA DE MONTAJE

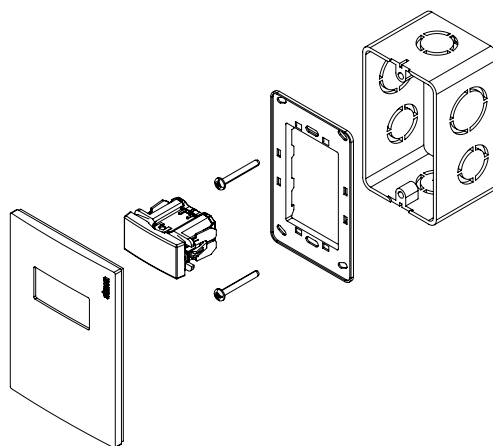

\*Placa y chasis NO incluidos

## DIAGRAMA DE CONEXIÓN

